

# Hydraulic Power Supply

(HPS)

PrimeServ Academy Copenhagen

**MAN PrimeServ**



# Learning objectives

## Upon completion of this module you ...

- will be able to recognize the various parts in the HPS system.
- will be able to explain the HPS system.




# Agenda

Hydraulic Power Supply (HPS)

- 1 System**
- 2 Filter unit**
- 3 Startup pumps**
- 4 Engine driven pumps**
- 5 Valve block**
- 6 Electric driven pumps**


# Hydraulic Power Supply (HPS)

System – Lubricating and cooling oil system

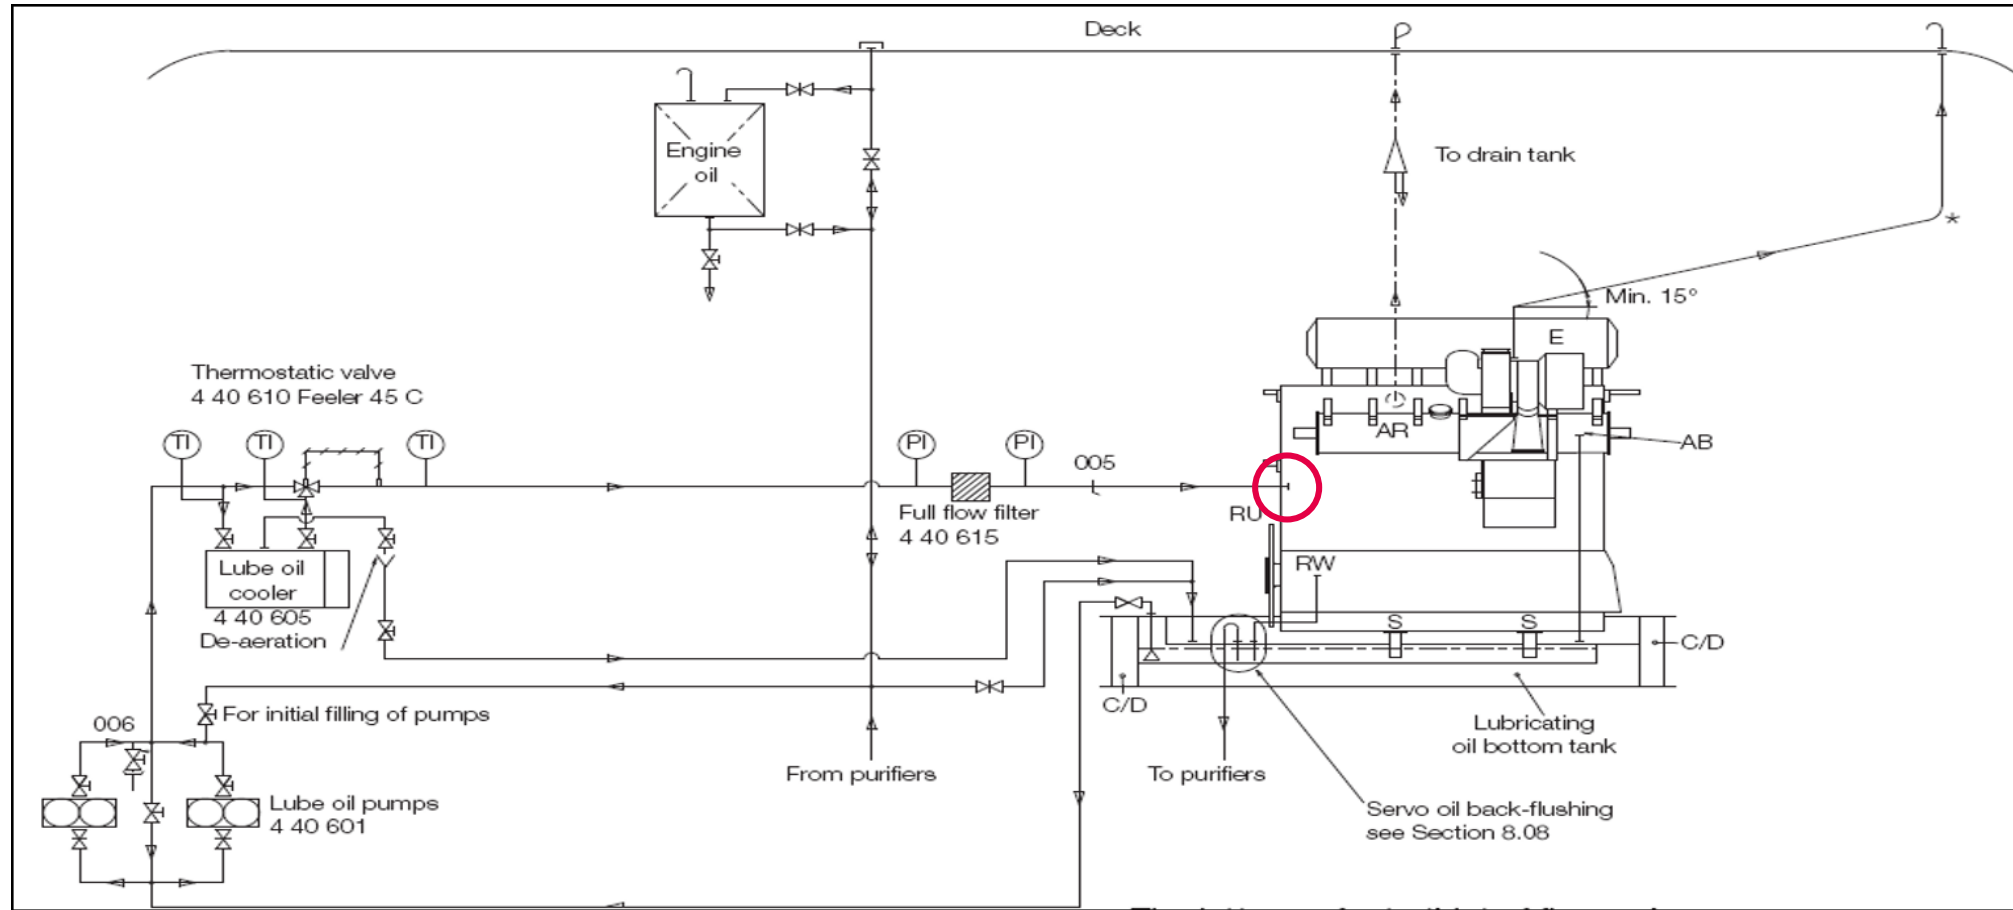

# Hydraulic Power Supply (HPS)


System – Integrated hydraulic system (200 bar)

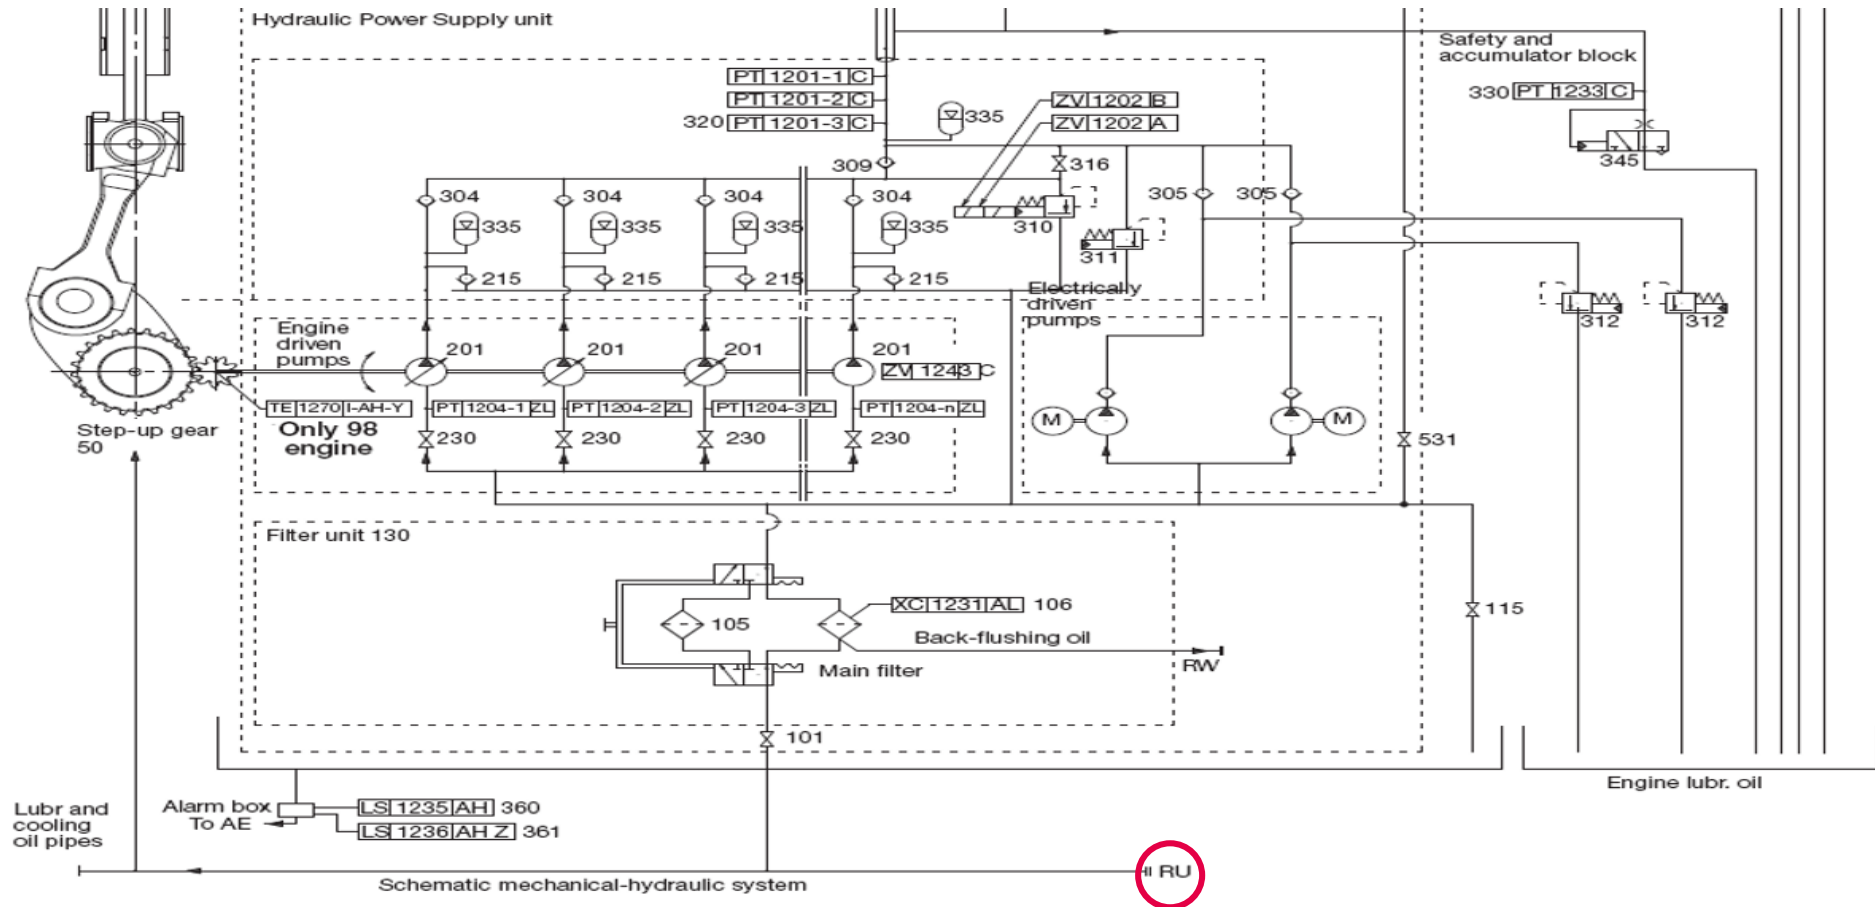

Contamination of hydraulic oil must not exceed: ISO 4406: 16 / 13 NAS Code: 7 or 8


# Hydraulic Power Supply (HPS)

System – Separate hydraulic system (option)

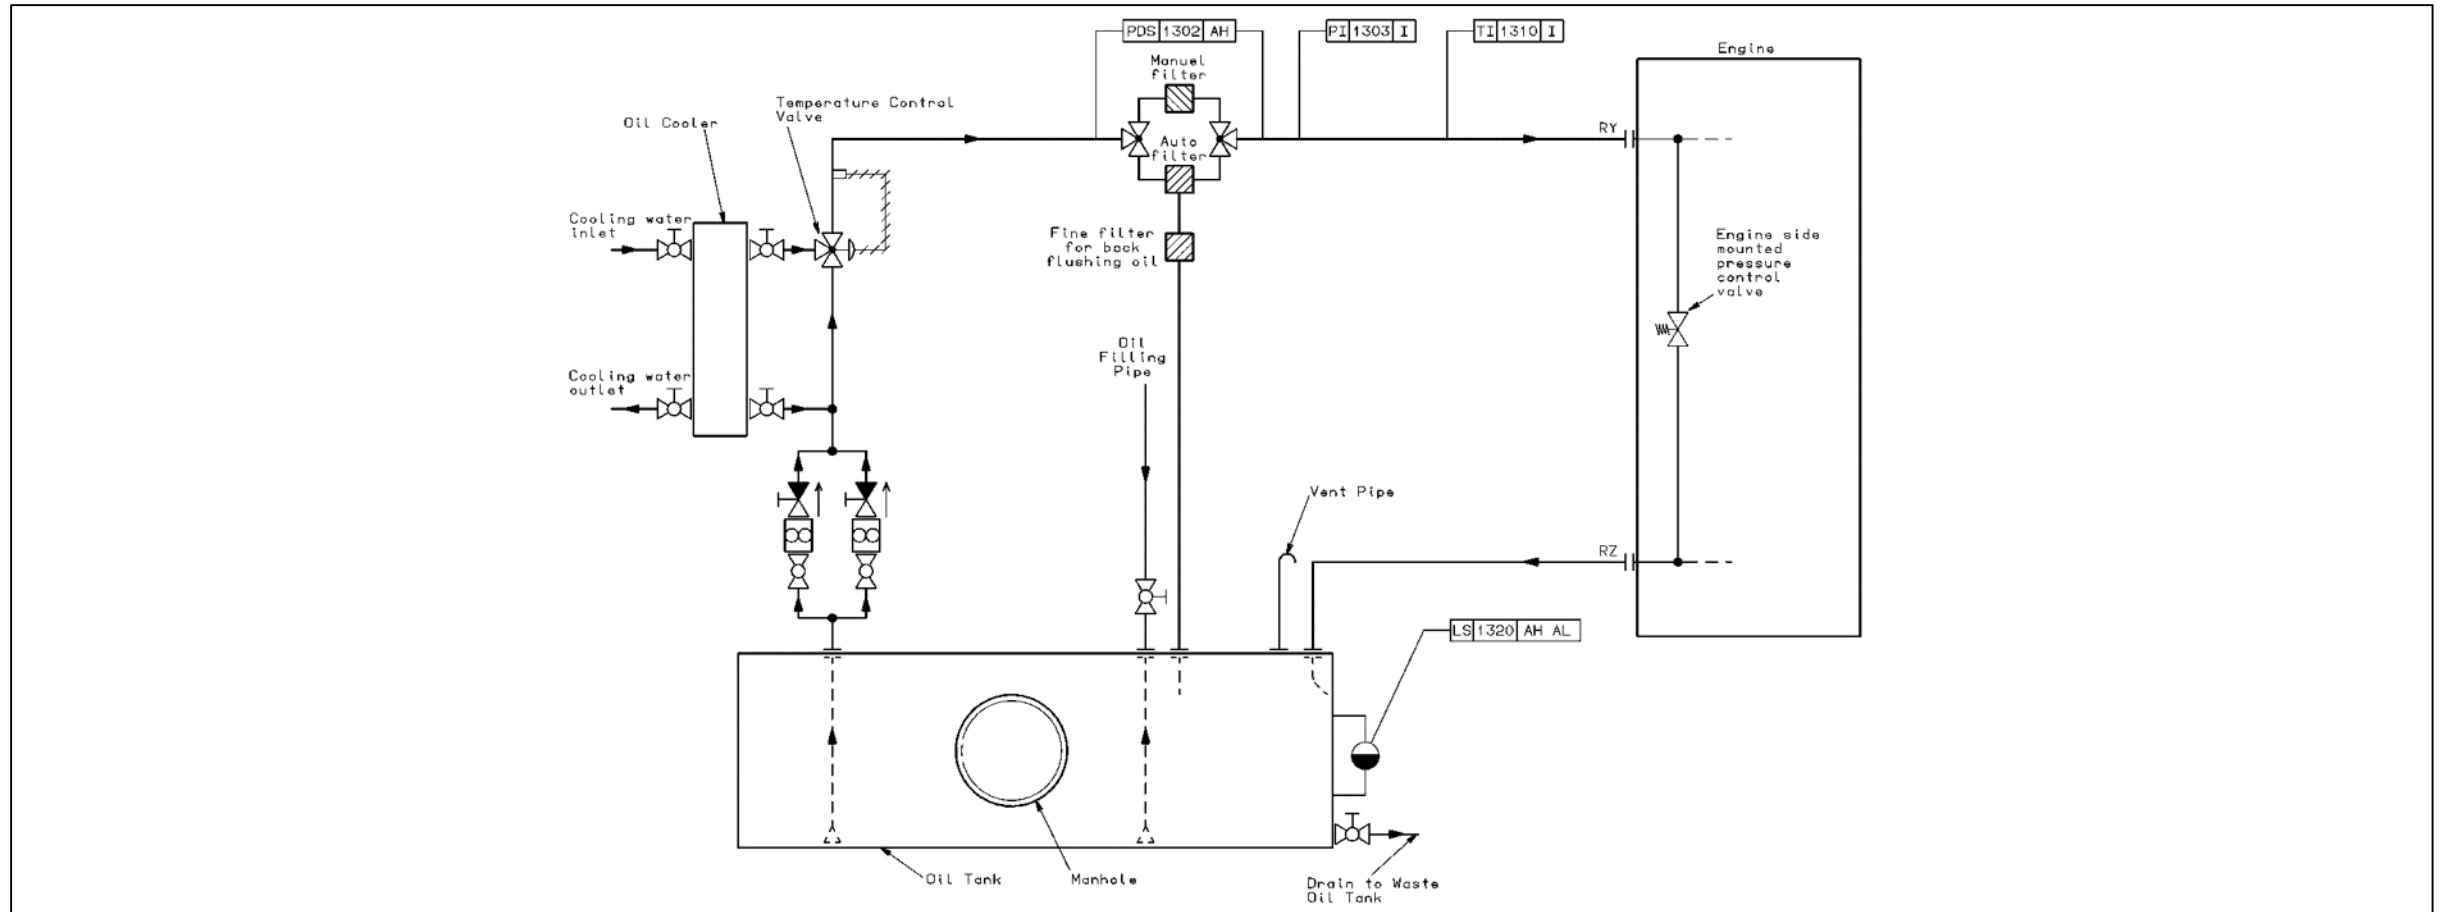


# Hydraulic Power Supply (HPS)


System - Engine driven hydraulic pumps; Three different setups

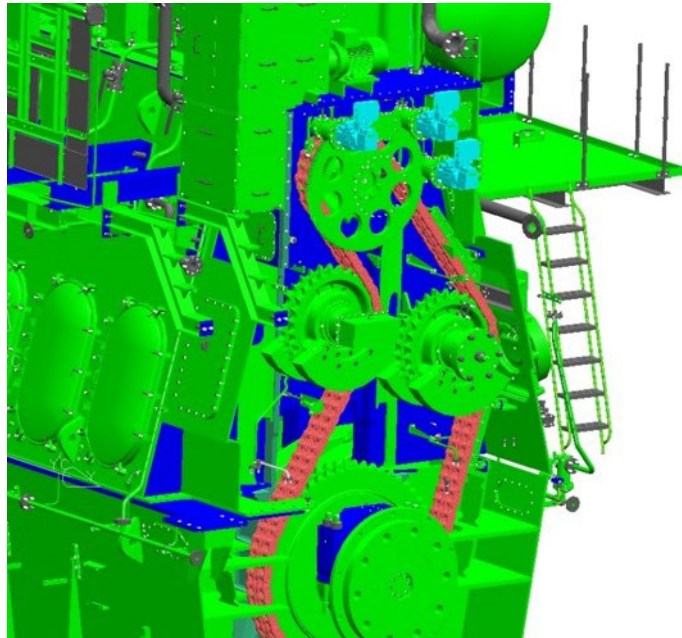

**Aft with chain drive in case of a bore size more than 50**

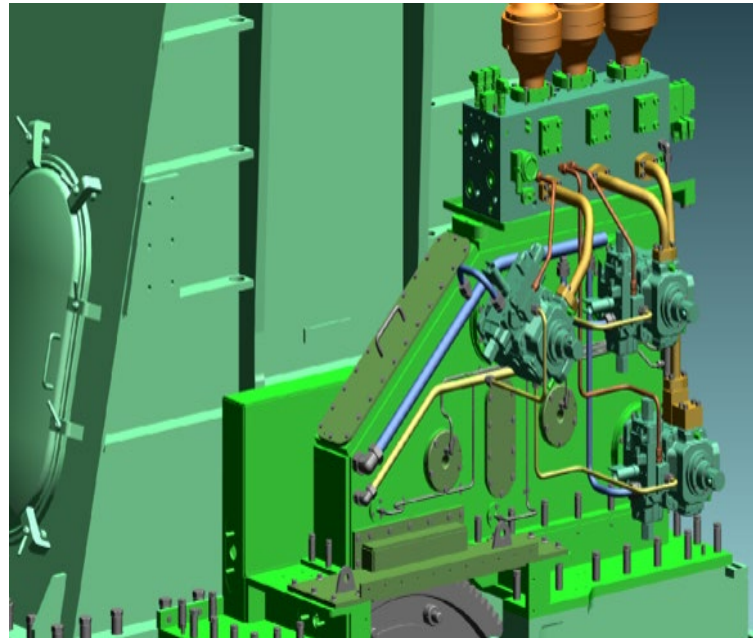

**Aft with gear box in case of a bore size of 50 and less**

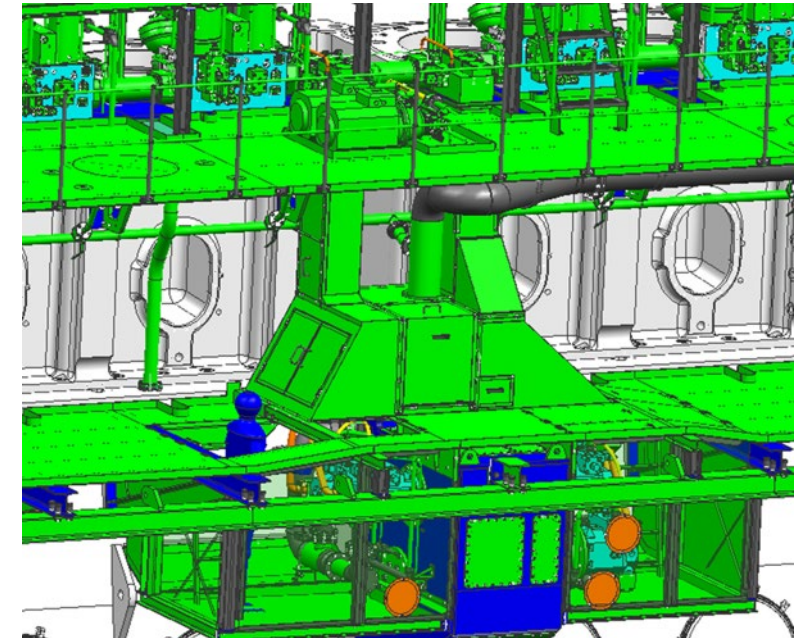

**Between cylinder 6 and 7 for engines with a bore size of 90 or 98 and with more than 9 cylinders**

# Agenda


Hydraulic Power Supply (HPS)

- 1 System**
- 2 Filter unit**
- 3 Startup pumps**
- 4 Engine driven pumps**
- 5 Valve block**
- 6 Electric driven pumps**



# Hydraulic Power Supply (HPS)

Filter unit

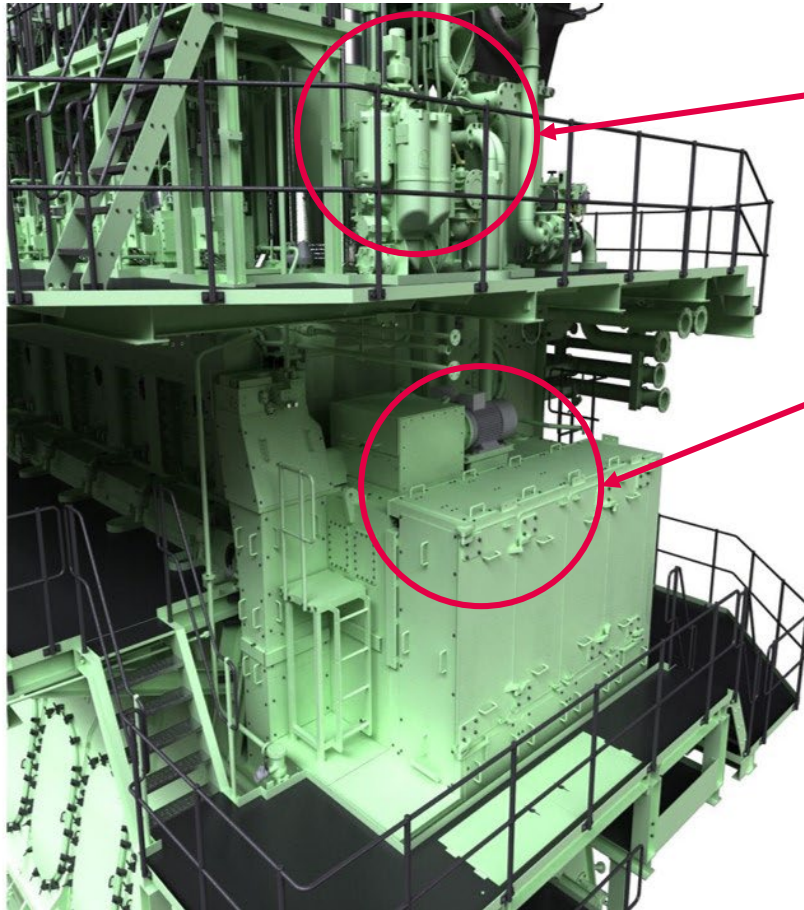


**Automatic backflush filter**

**Hydraulic Power Supply (HPS)  
and startup pumps**

# Hydraulic Power Supply (HPS)

Filter unit – Boll & Kirch ver. 6.64

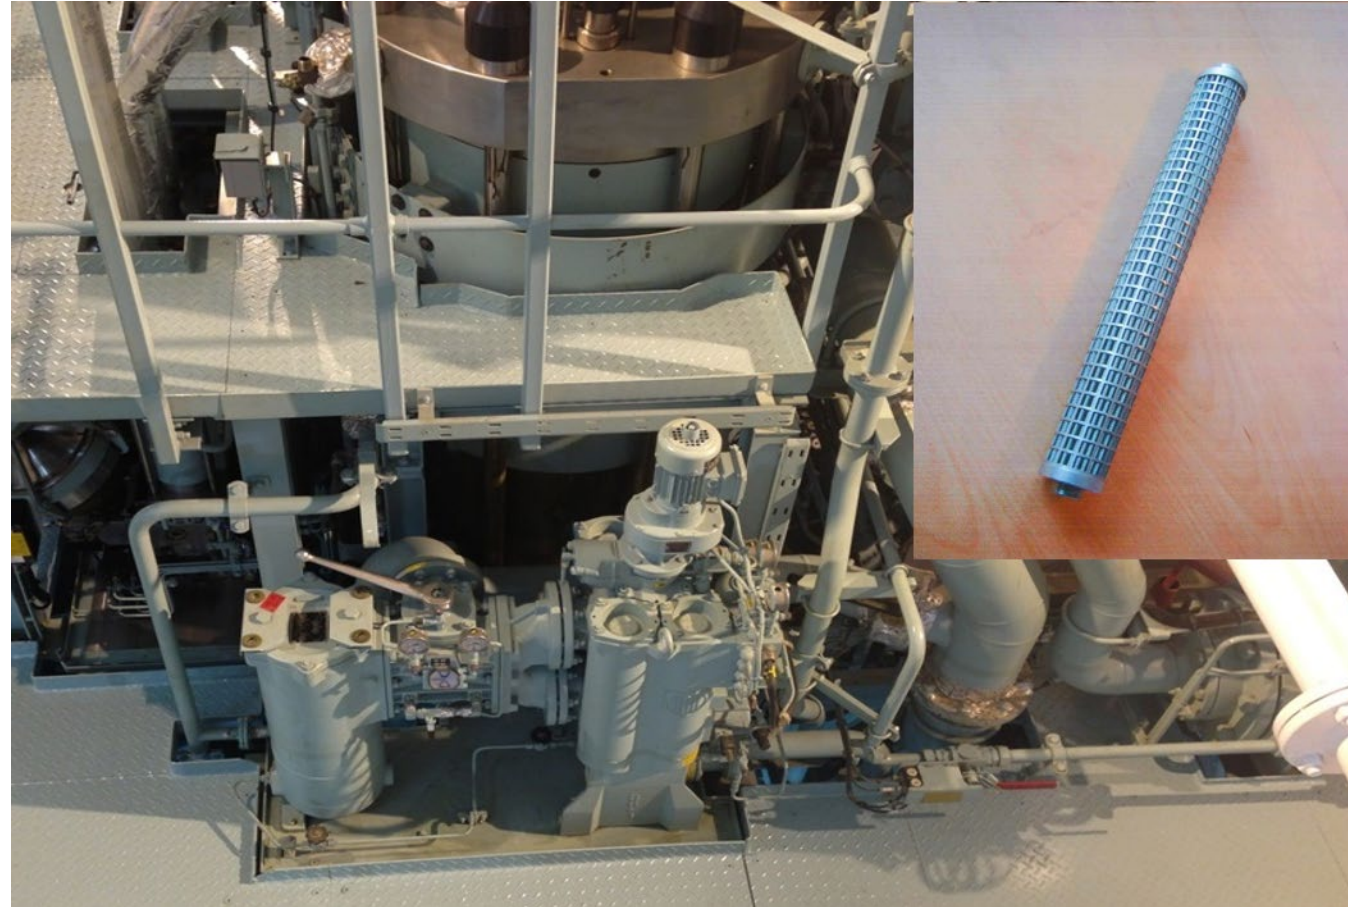

# Hydraulic Power Supply (HPS)

Filter unit - Cartridges



**6  $\mu$ m filter cartridge:**


09 / 06 = production month / year

1341446 = filter cartridge ID


**Sintered filter material**

# Hydraulic Power Supply (HPS)

## Filter unit – Layout and principle

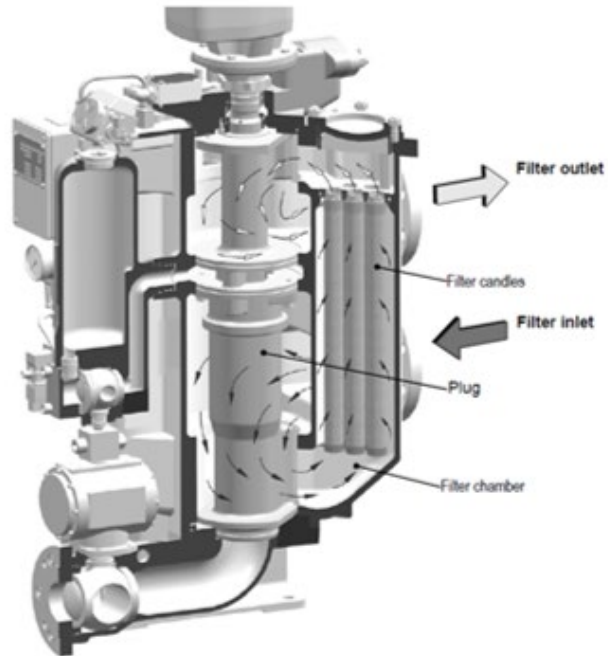



**Backflushing, initiated at interval of every 60 minutes.**  
**Pressure dependent backflushing, initiated at  $dP=0,6$  bar.**  
**Pressure dependent alarm, initiated at  $dP=0,8$  bar.**

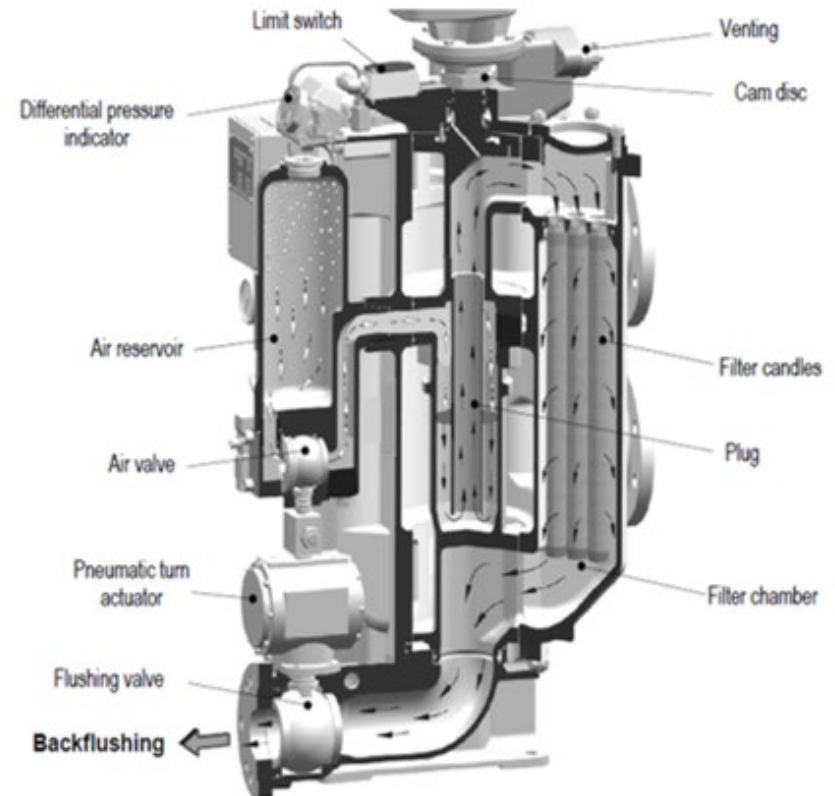

**Back flushing process**

# Hydraulic Power Supply (HPS)

Filter unit – Back flush line to sump tank

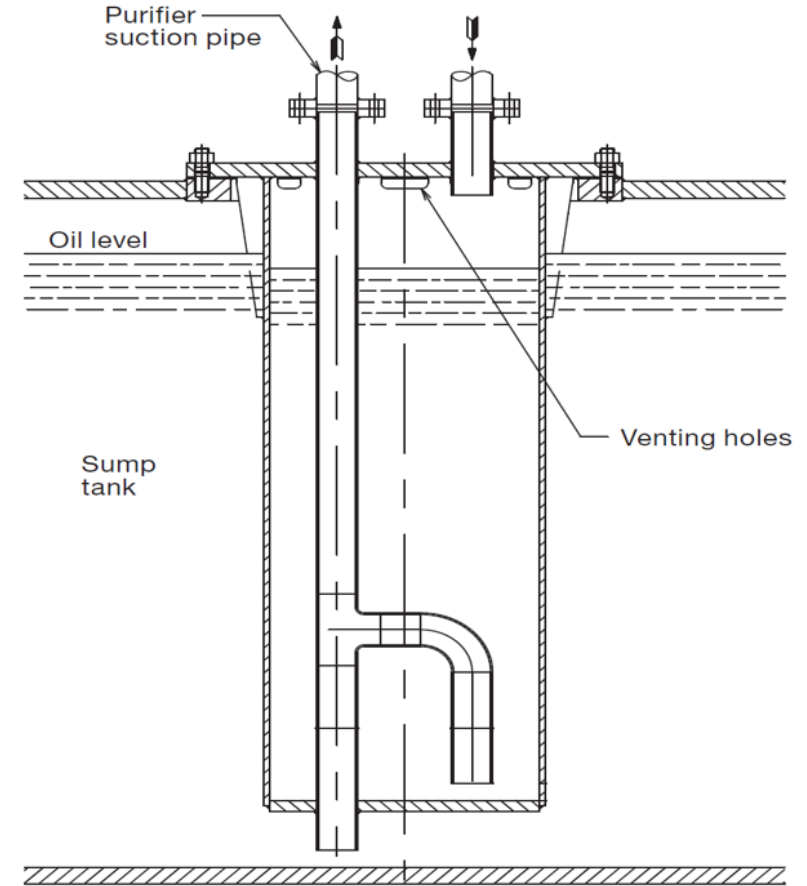
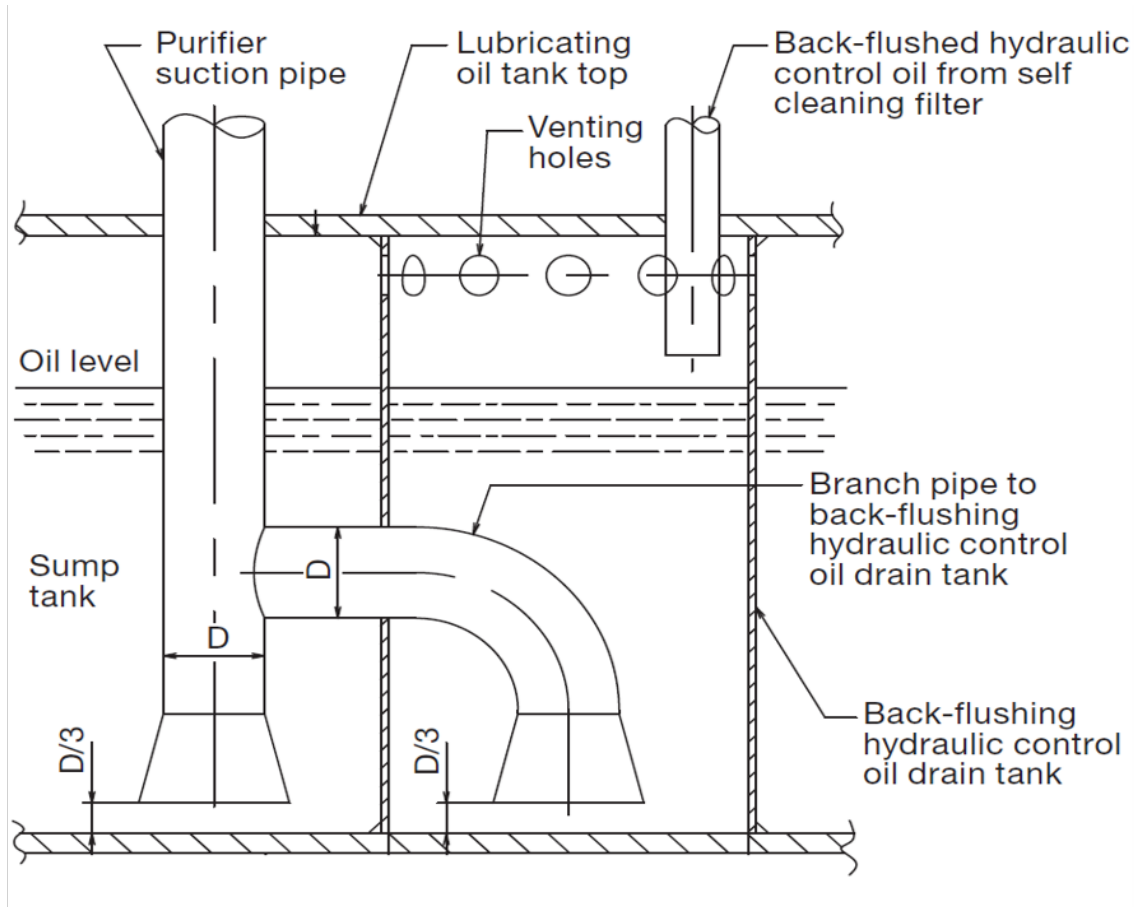


# Hydraulic Power Supply (HPS)

Filter unit - Kanagawa filter

## High Performance

MAN requirement : L.O. cleanliness level 16/13 any time

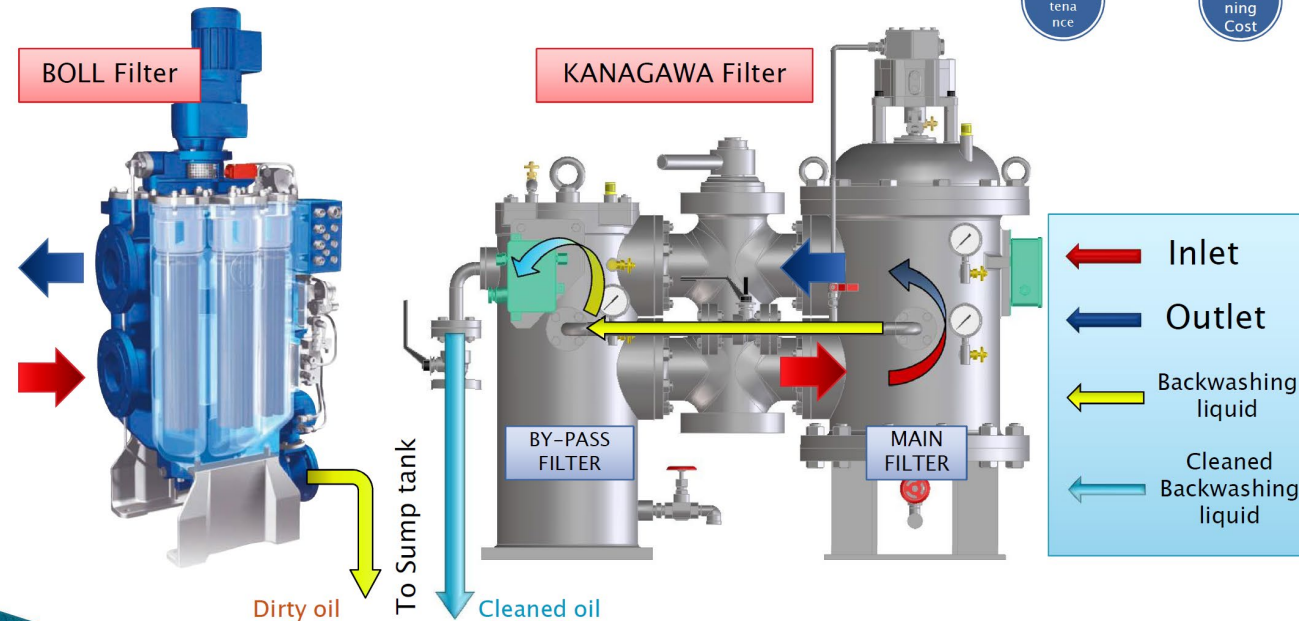

L.O. cleanliness level 16/13 is quite difficult to keep in a ship....  
KANAGAWA's answer is the system that is not to make sump tank dirty!


# Agenda

Hydraulic Power Supply (HPS)

- 1 System**
- 2 Filter unit**
- 3 Startup pumps**
- 4 Engine driven pumps**
- 5 Valve block**
- 6 Electric driven pumps**

# Hydraulic Power Supply (HPS)


Startup pumps – Pump designs

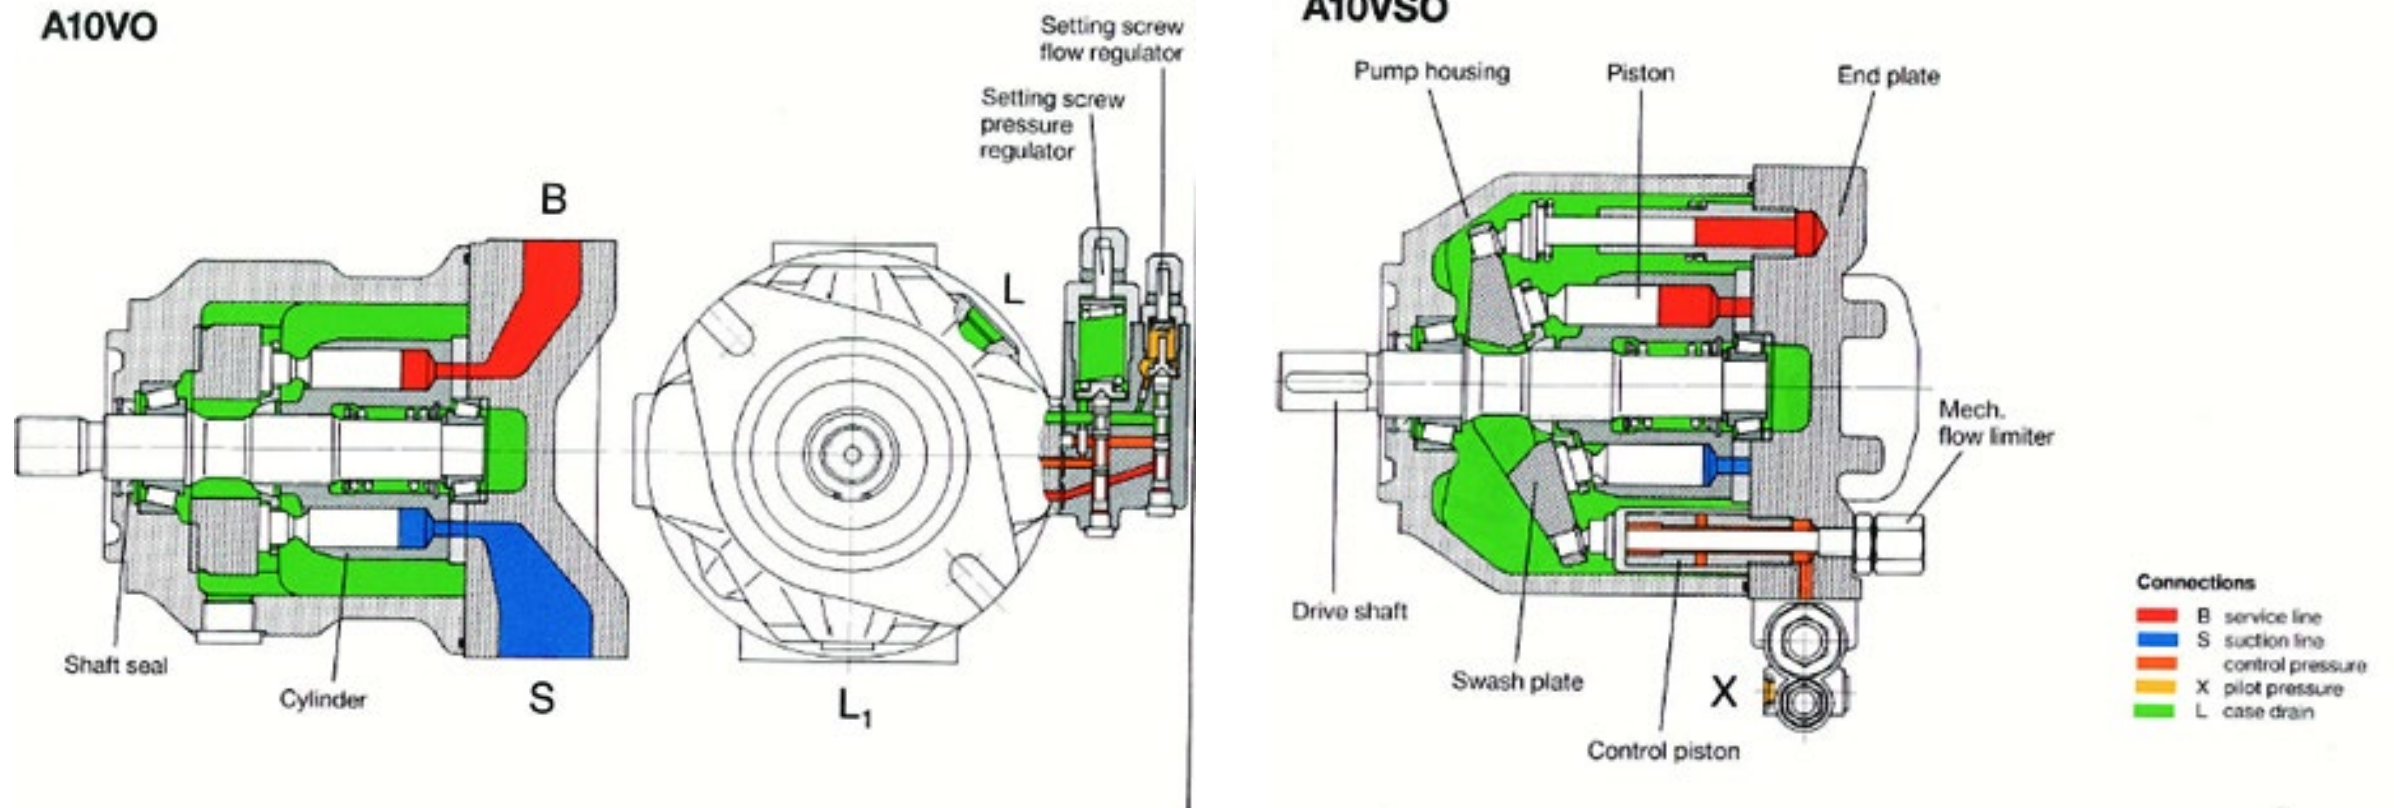




# Hydraulic Power Supply (HPS)

Startup pumps – Layout

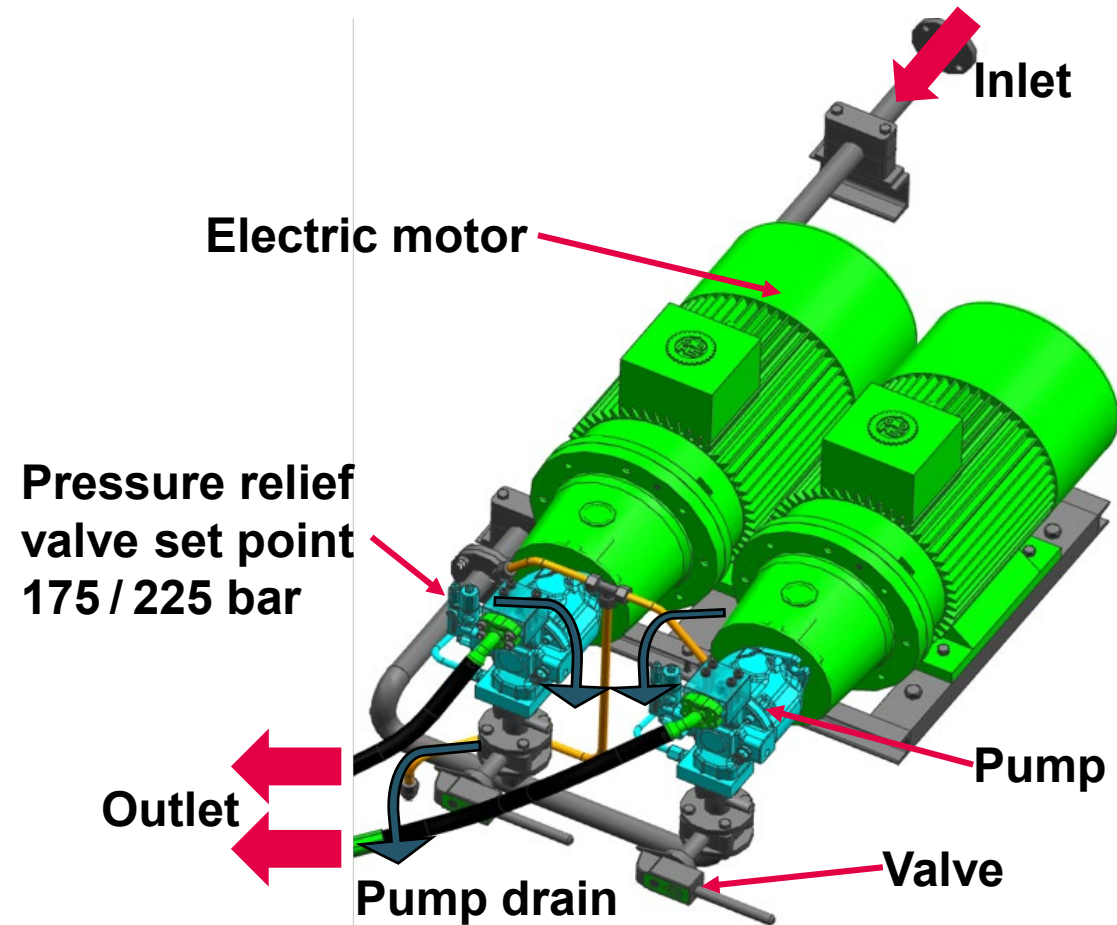

# Hydraulic Power Supply (HPS)

## Startup pumps – Control

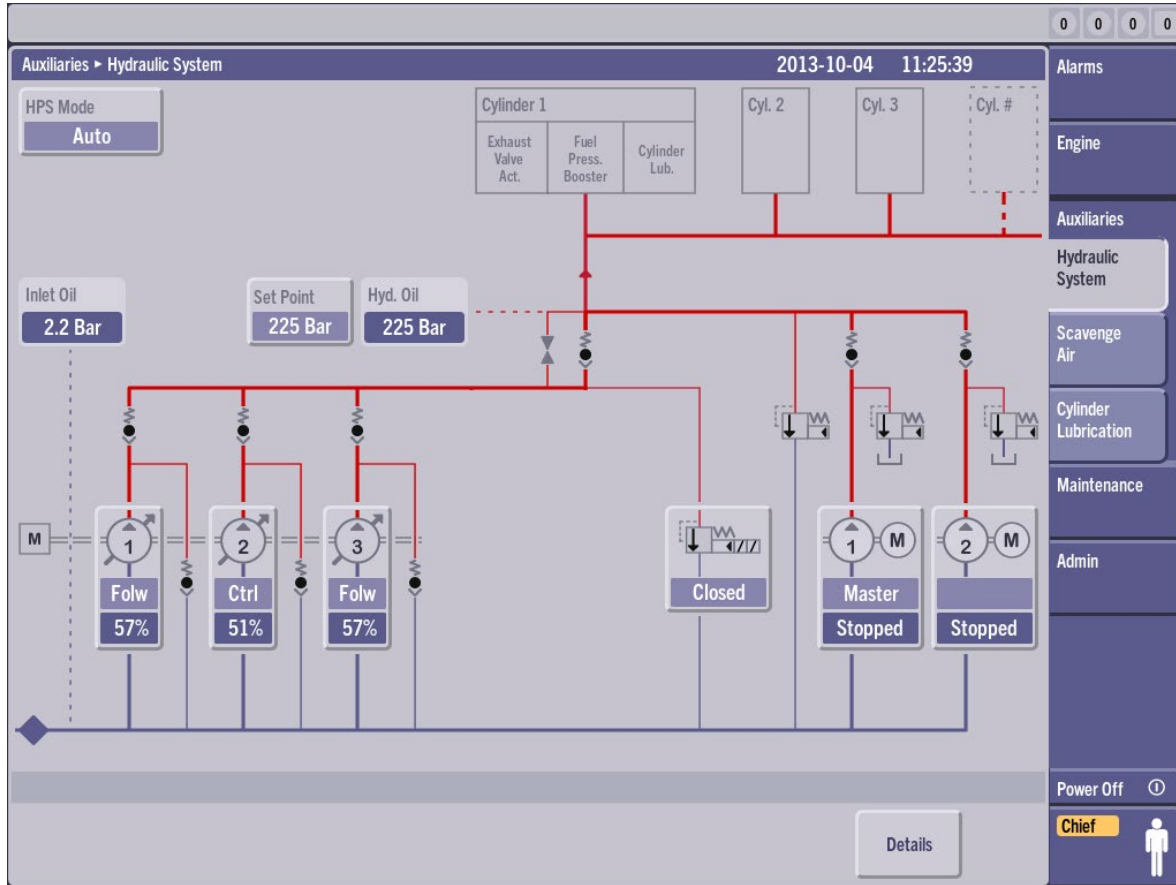

## Automatic mode

- Master pump running at engine standby (both pumps are running during pressure build up)
- Stopped at finish with engine
- Stopped via timer at a specified engine RPM (default 15% MCR)



# Agenda

Hydraulic Power Supply (HPS)

- 1 System**
- 2 Filter unit**
- 3 Startup pumps**
- 4 Engine driven pumps**
- 5 Valve block**
- 6 Electric driven pumps**


# Hydraulic Power Supply (HPS)

Engine driven pumps – Axial piston pumps

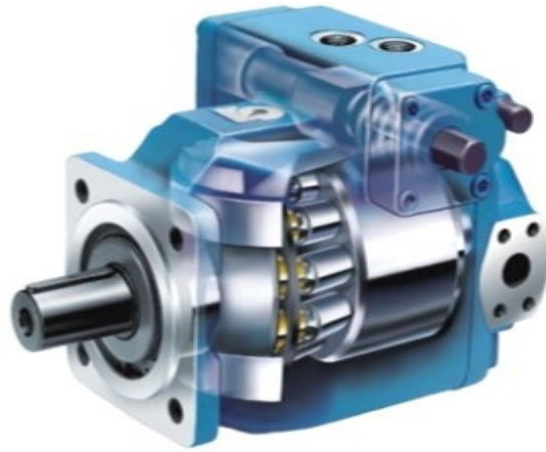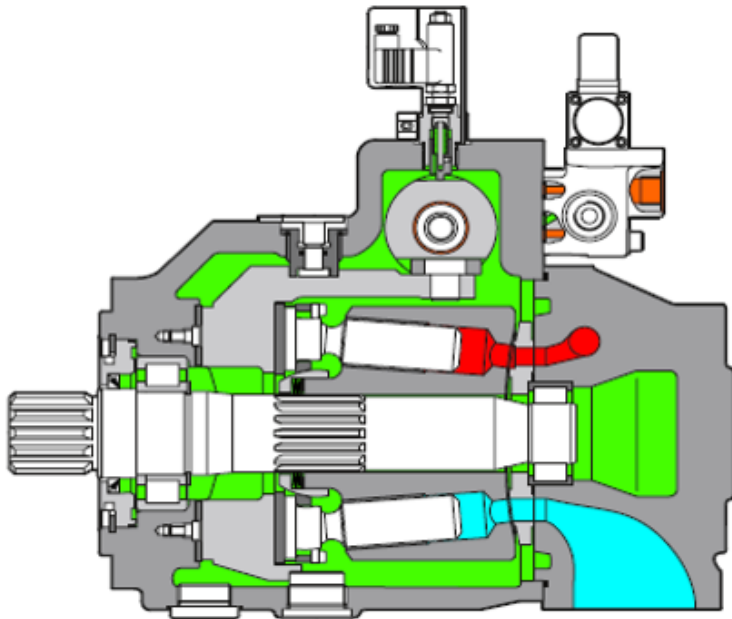




**Axial Piston Pump – A4VSO xxx  
HS3xxx... (Bosch - Rexroth)**

Inlet, 2 Bar
Outlet, 300 Bar
Control pressure
Case drain

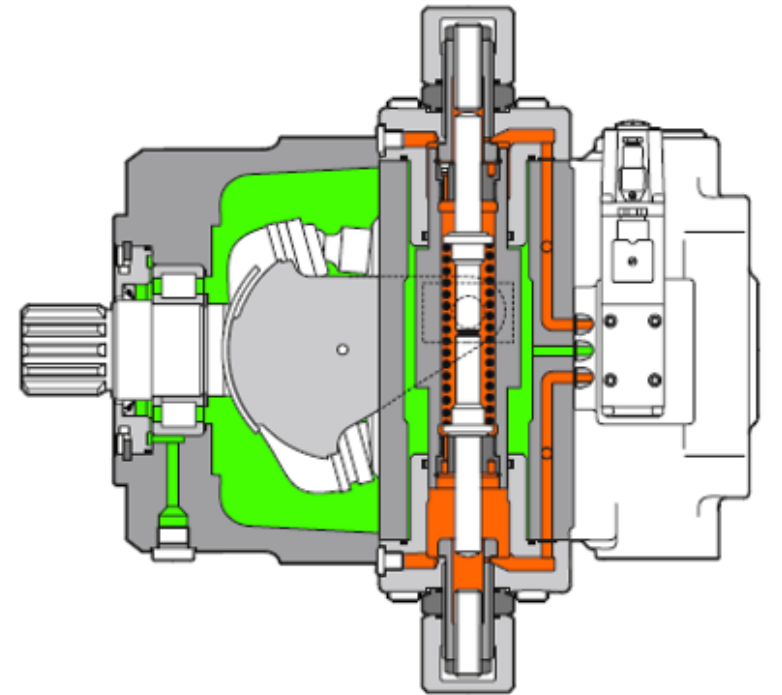



# Hydraulic Power Supply (HPS)

Engine driven pumps – Pilot valves Parker, MOOG or Bosch

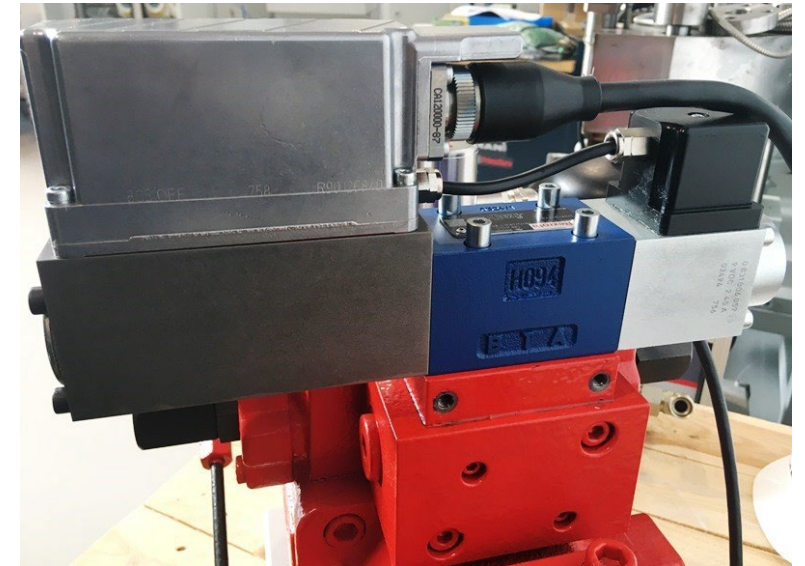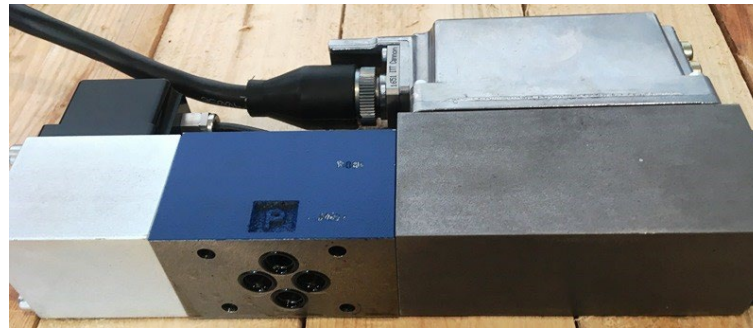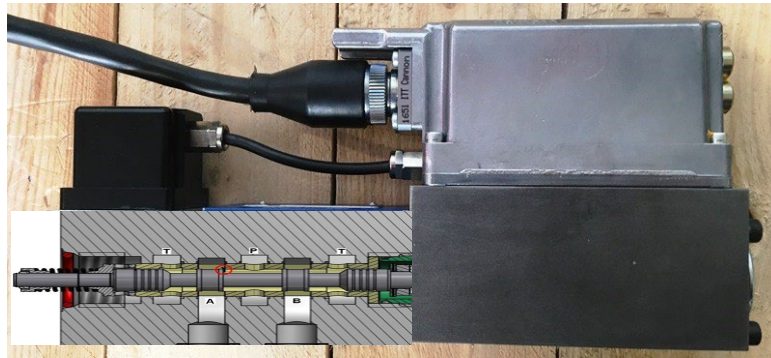


# Hydraulic Power Supply (HPS)

Engine driven pumps – Swash plate principle

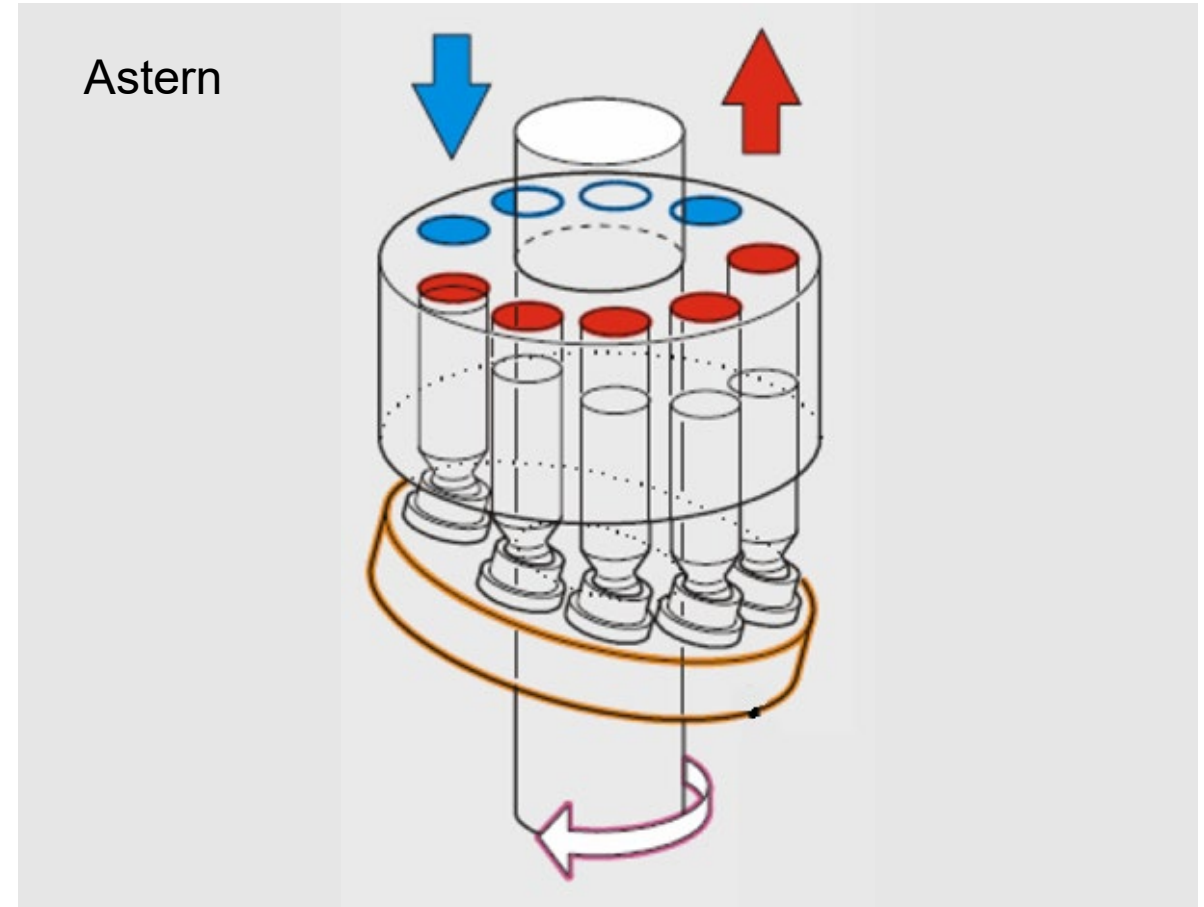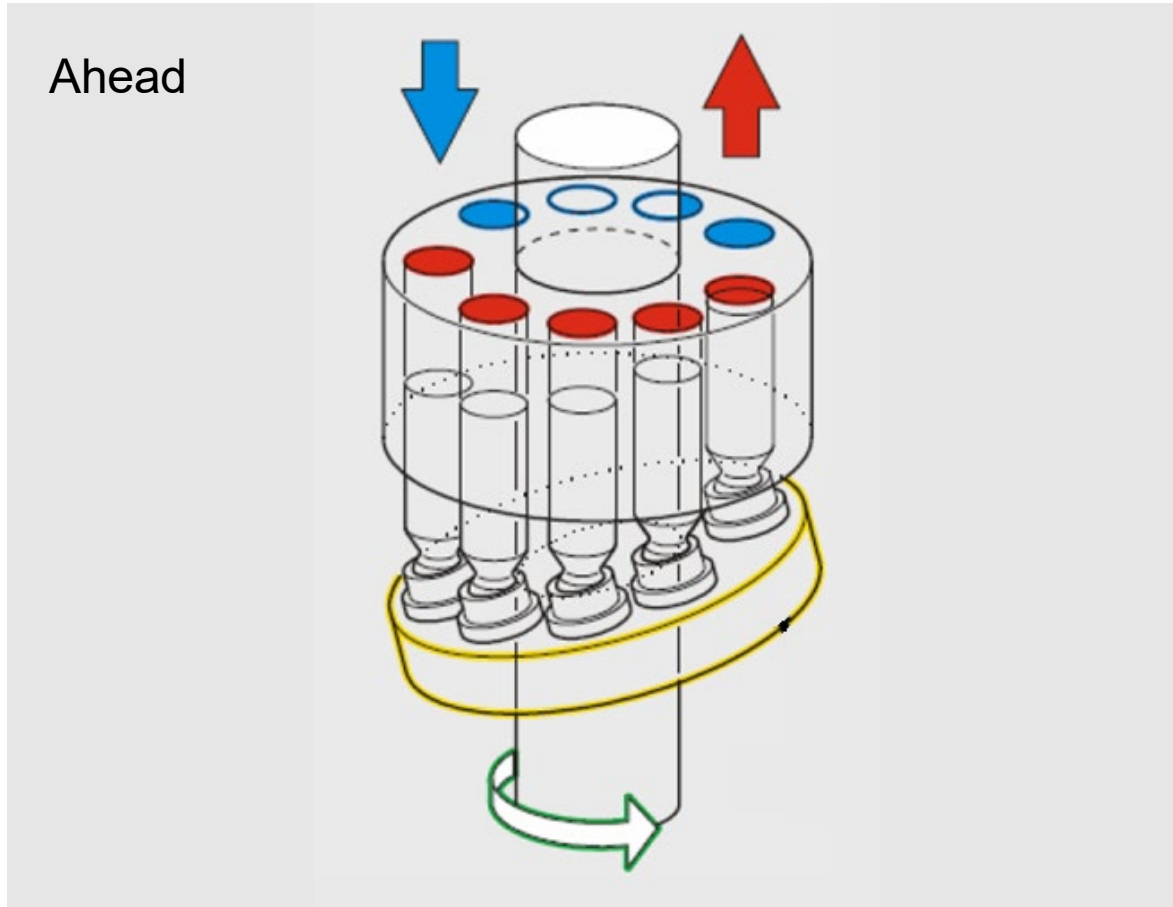


# Hydraulic Power Supply (HPS)

Engine driven pumps – Swash plate principle

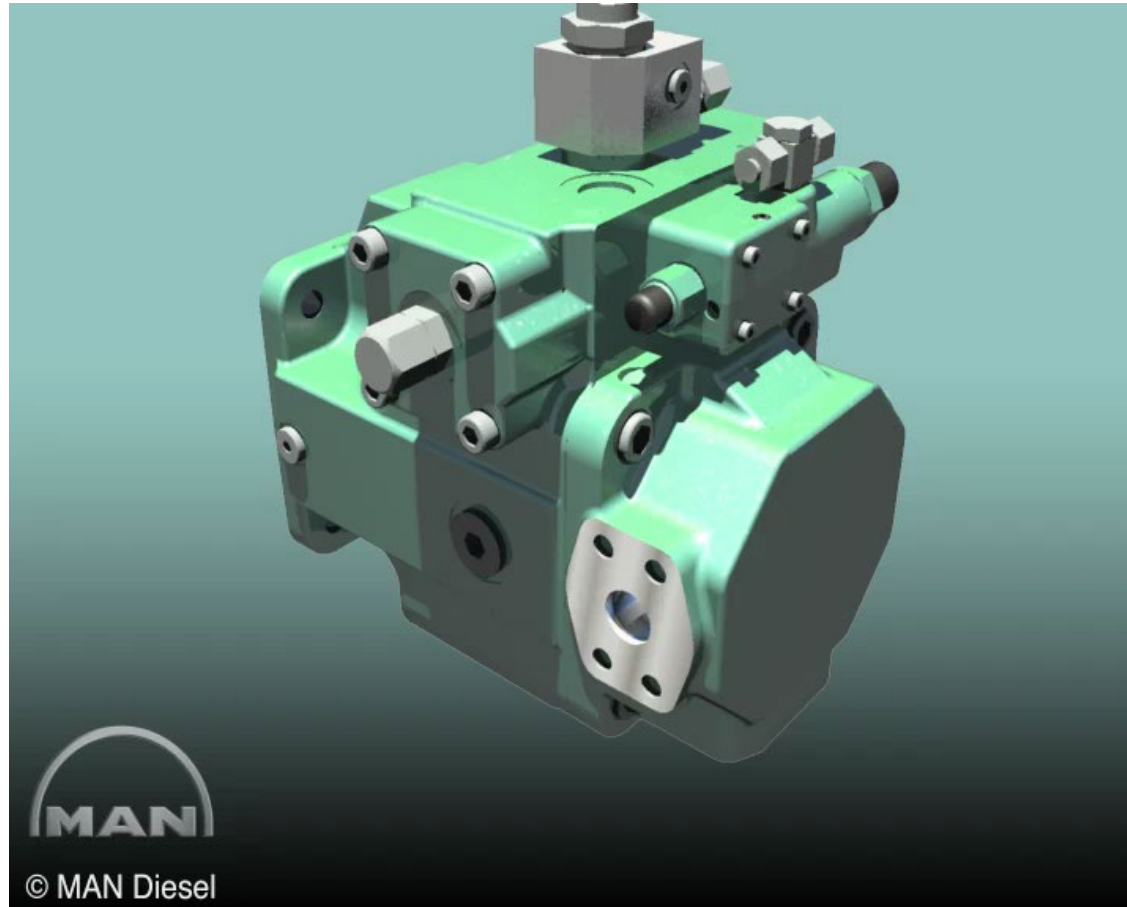

# Hydraulic Power Supply (HPS)


Engine driven pumps – Gear box

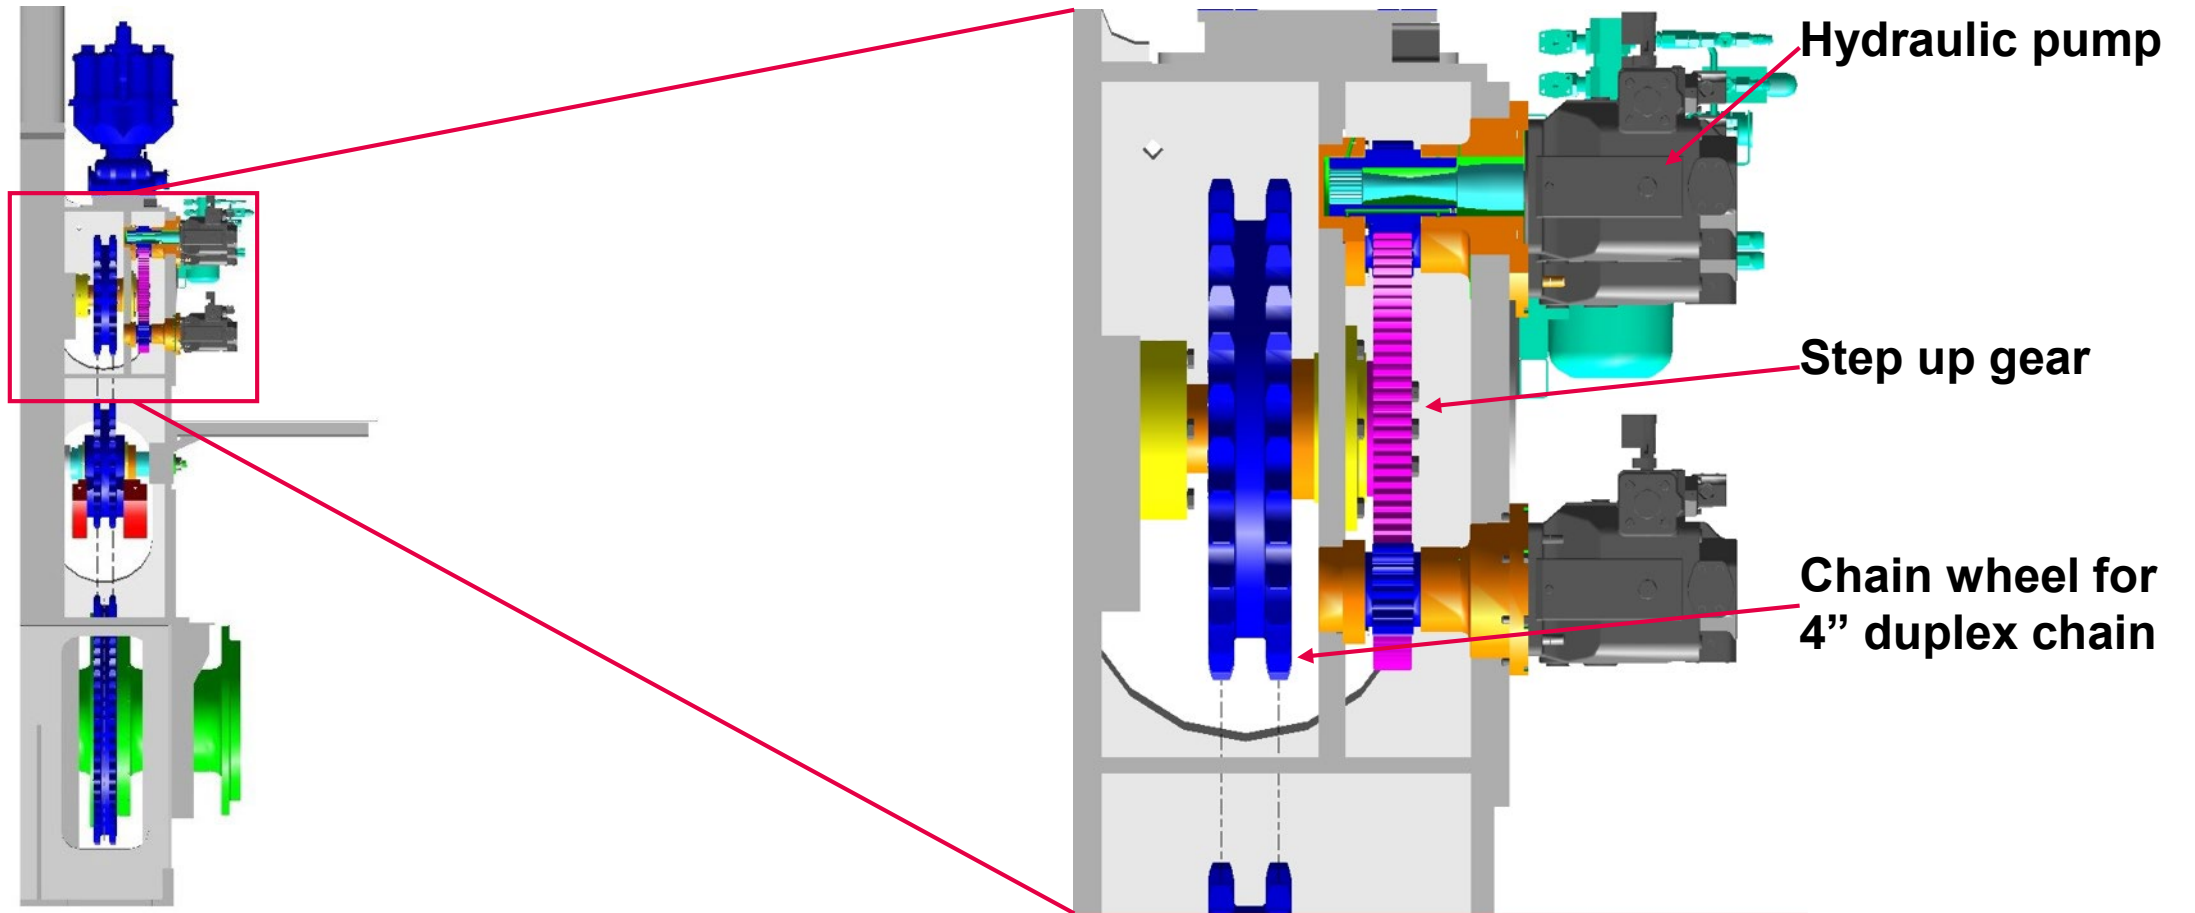




# Hydraulic Power Supply (HPS)

Engine driven pumps – Gear box

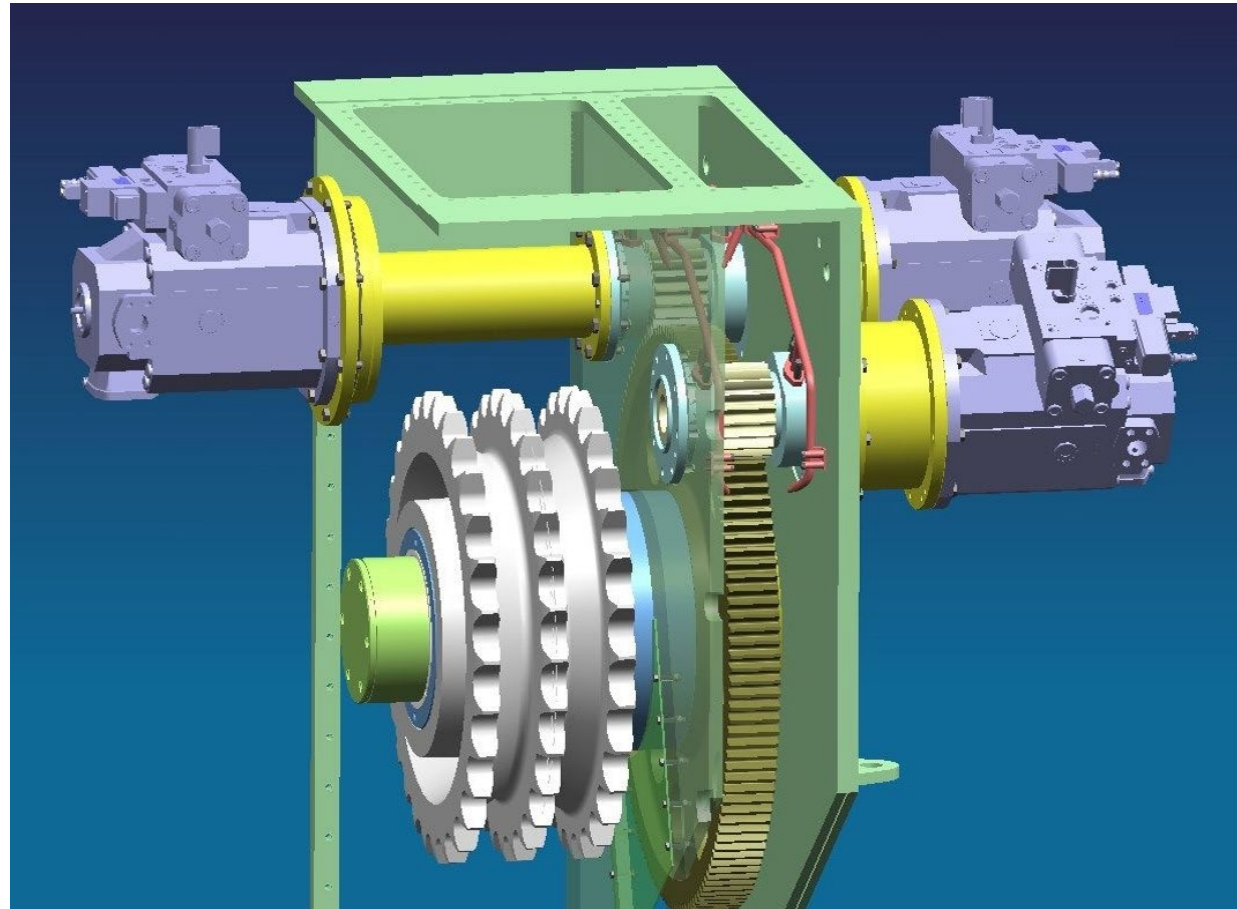

# Hydraulic Power Supply (HPS)


Engine driven pumps – Safety shaft principle

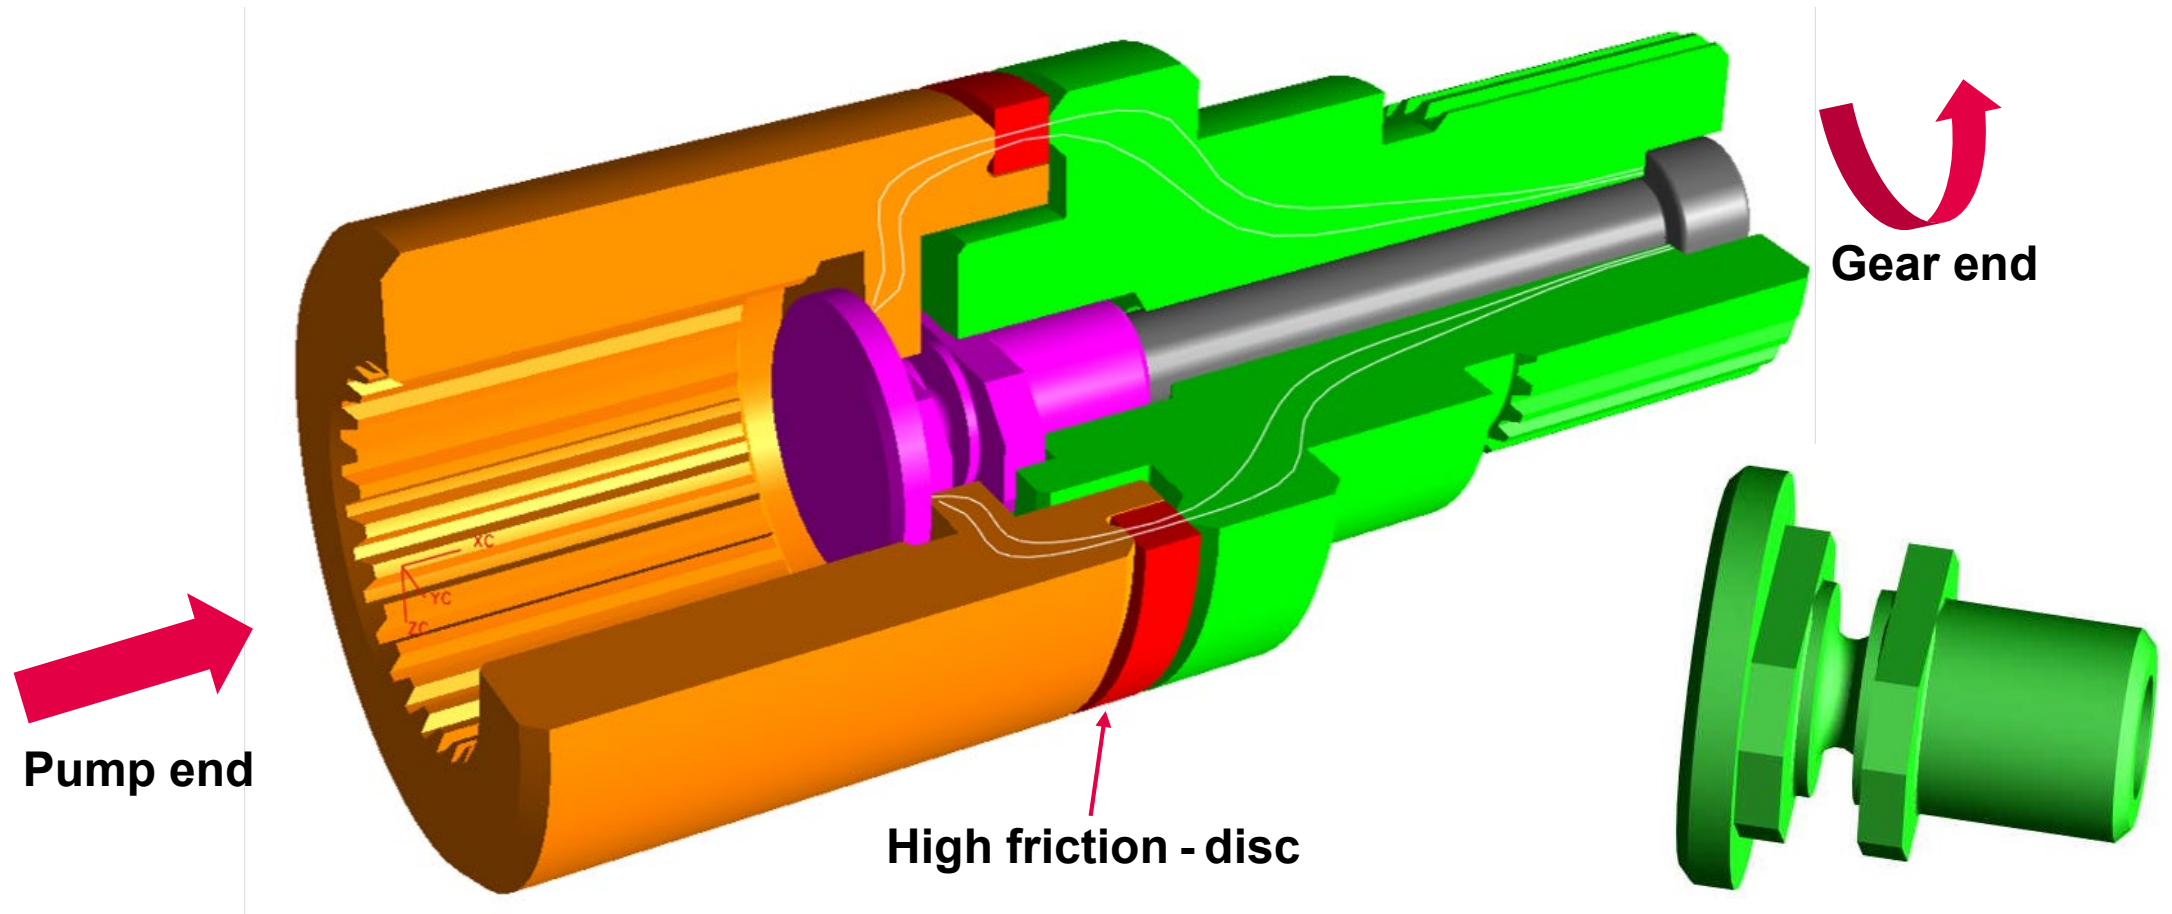

# Hydraulic Power Supply (HPS)



Engine driven pumps – Complete HPS 12K98ME Mark 4

HPS high pressure hoses five years date of manufactory!

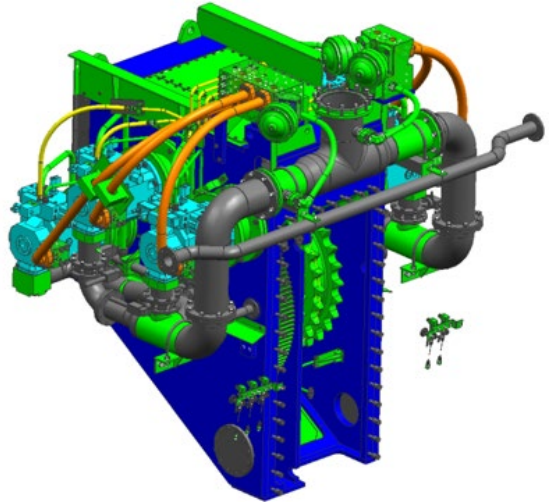



# Hydraulic Power Supply (HPS)

Engine driven pumps – 200 / 300 bars system

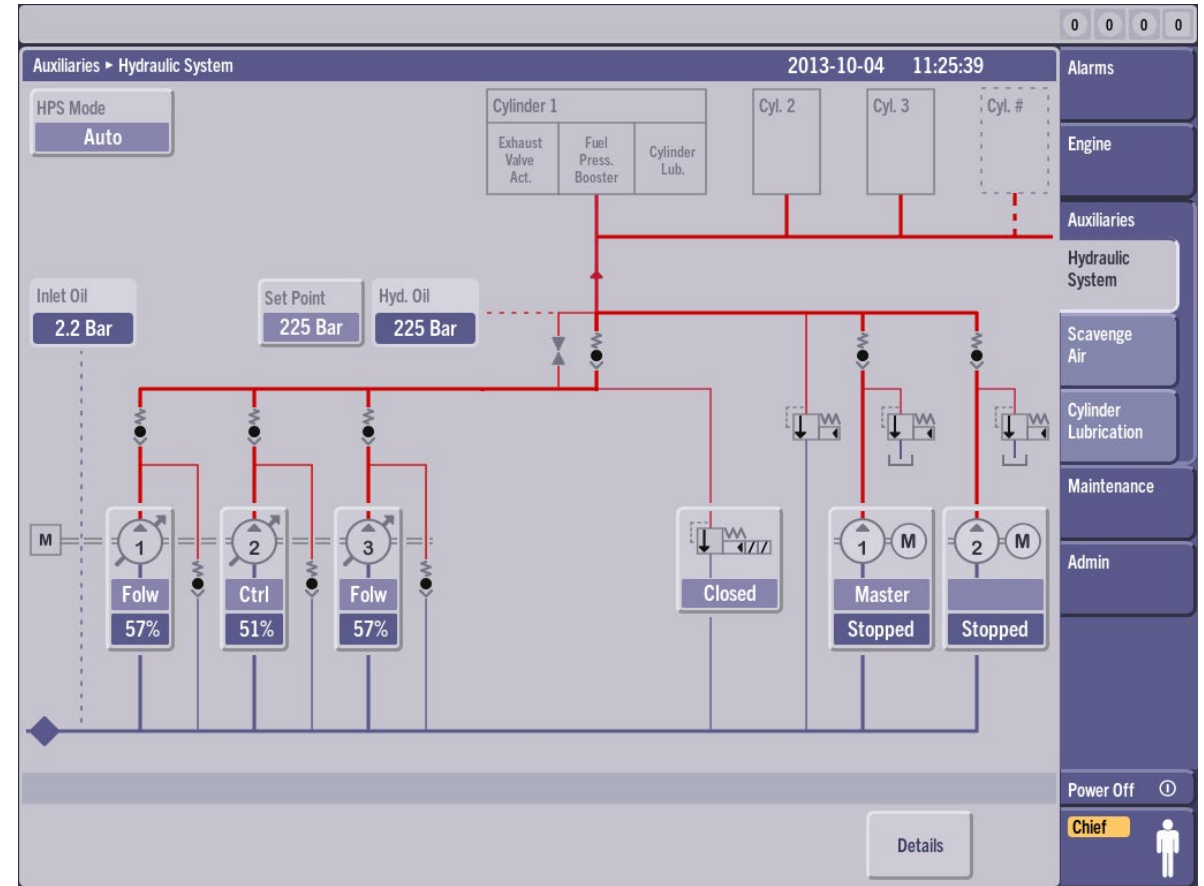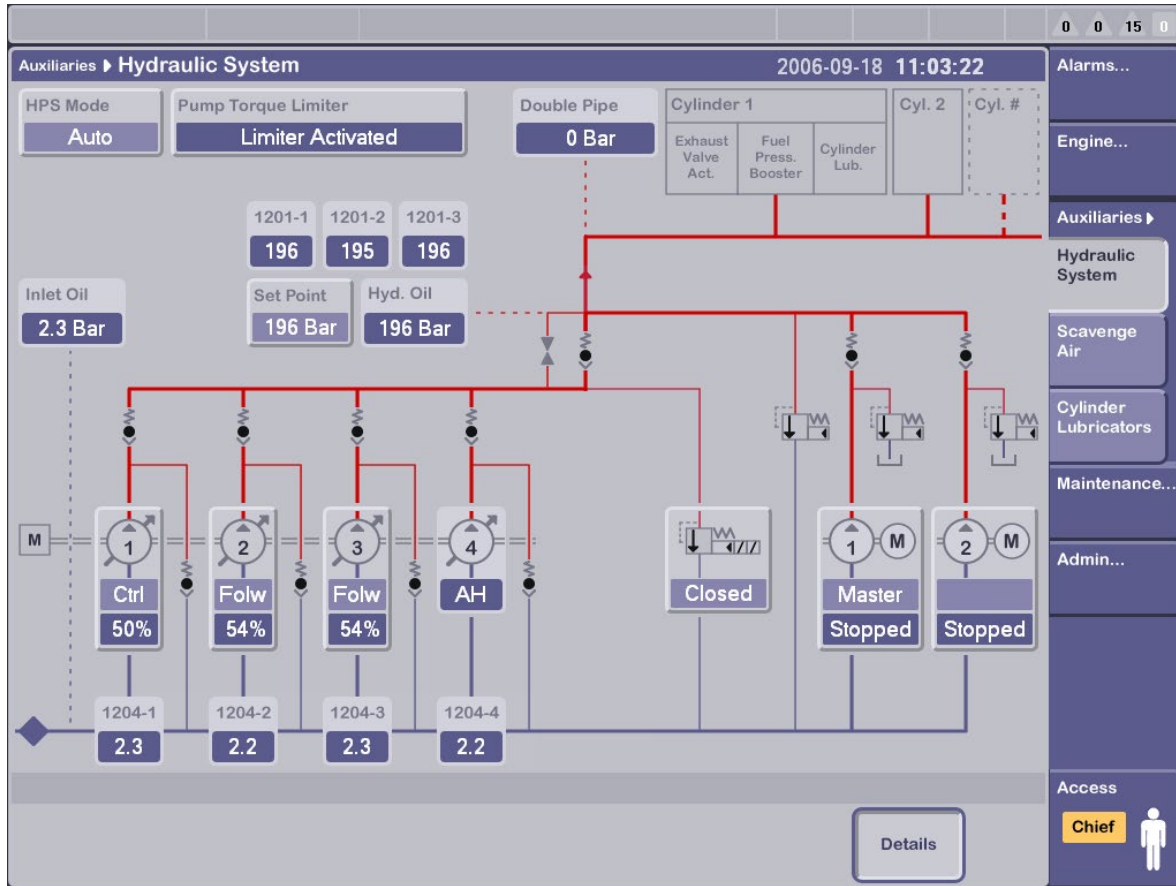

# Hydraulic Power Supply (HPS)

Engine driven pumps – Leak detection

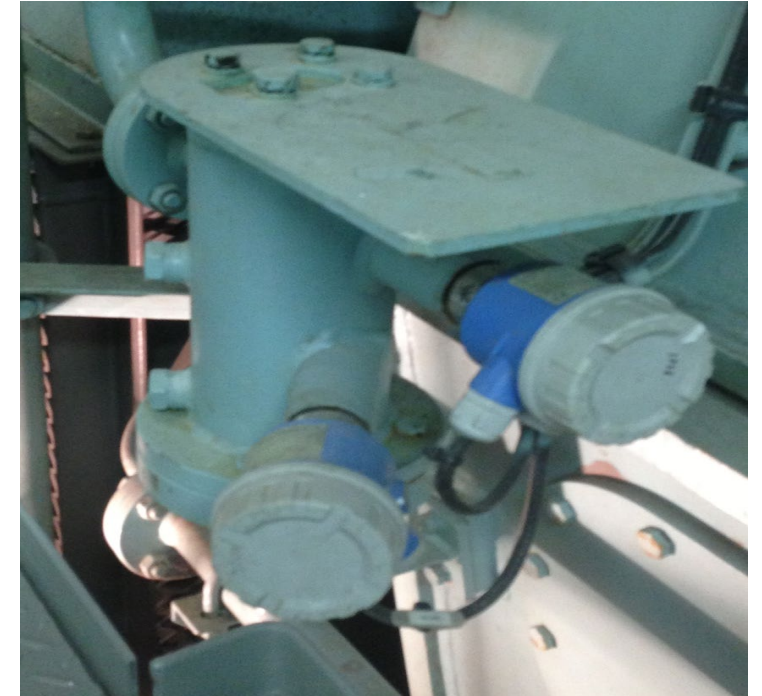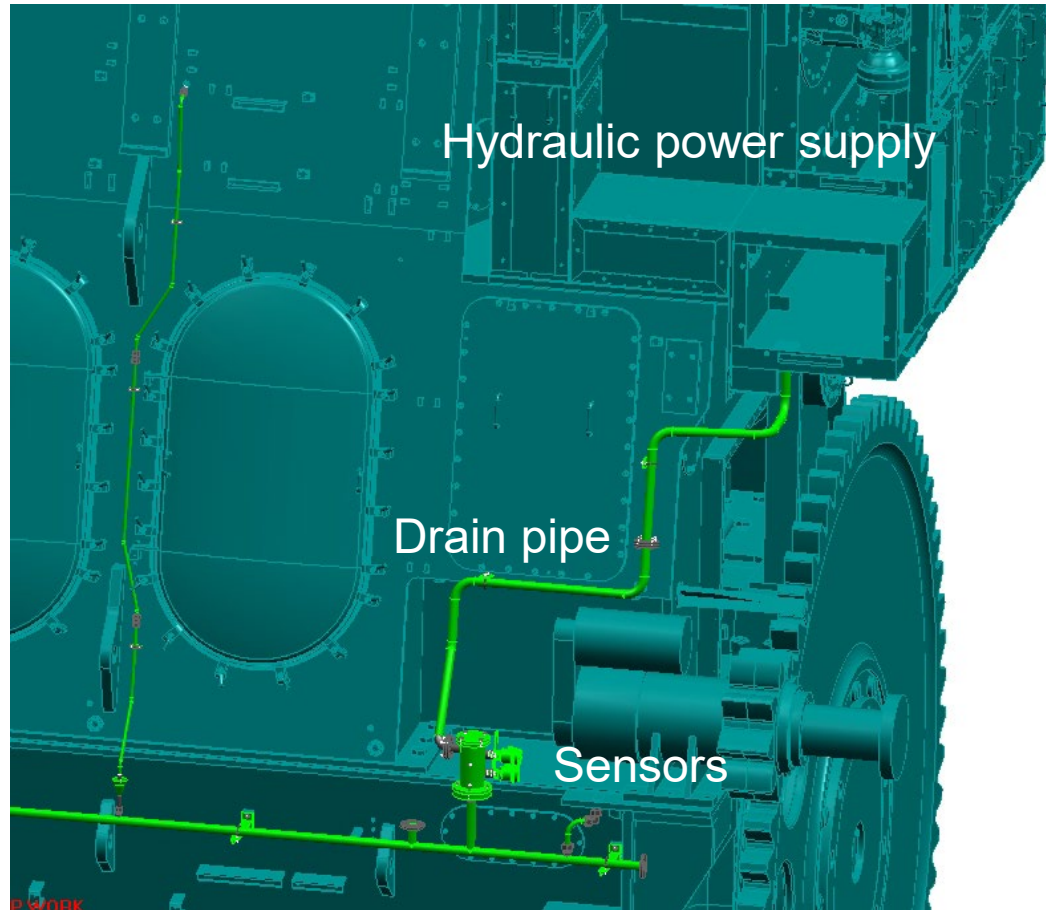

**“vibrating fork” type**

LS 1235 = Alarm

LS 1236 = Cancelable shut down

# Hydraulic Power Supply (HPS)


Engine driven pumps – Pressure sensors



# Hydraulic Power Supply

## Inlet Pressure Sensors

Average Inlet Sensors

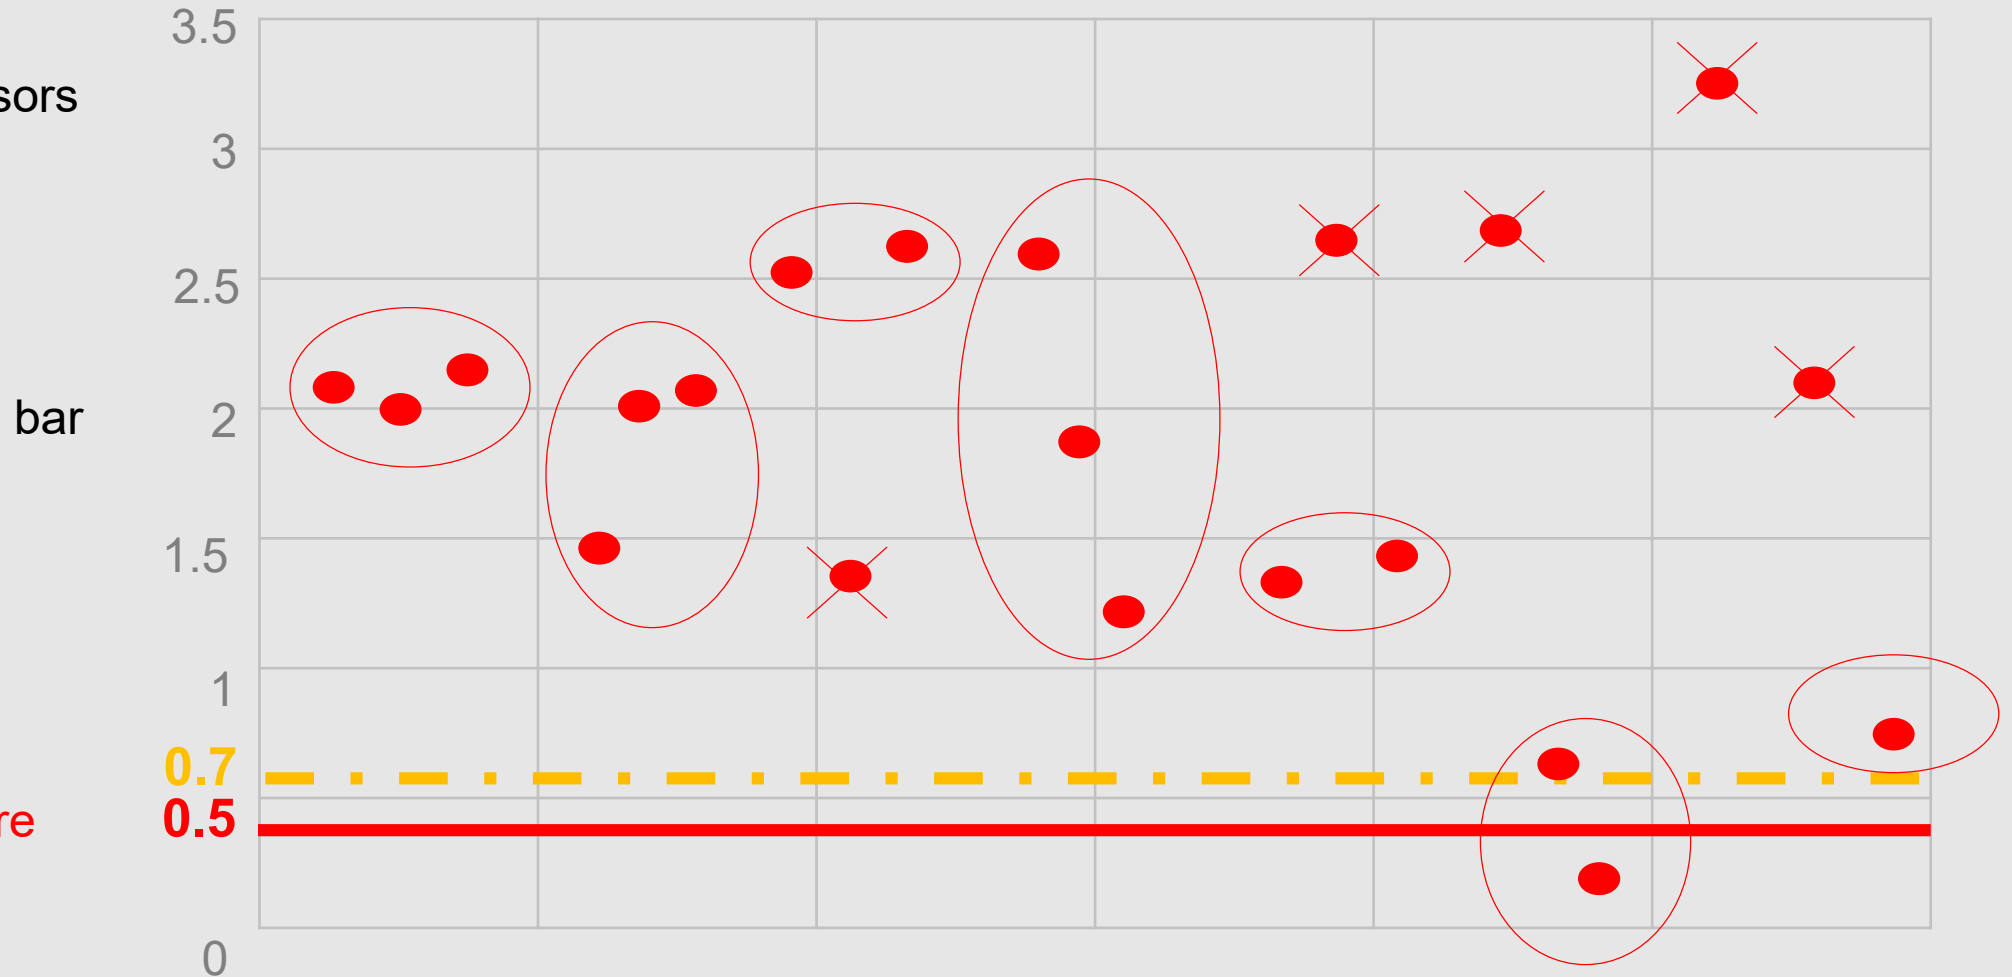

# Hydraulic Power Supply (HPS)

## Engine driven pumps – Summary

In case of control failure of a pump, the swash plate will be forced to +100% direction. (Ahead)

- Safe position of pilot valve.

## Engine driven pumps

- Pump No. 1 is controlled by ACU 1, pump 2 by ACU 2 and pump 3 by ACU 3.


Pump Nos. 1, 2, and 3 have their own sensor for system pressure, connected to their controlling ACU.

All pumps sensors for suction and discharged pressure have deviation monitoring.

- 1 bar at suction side
- 20 bar at discharge side (High pressure side)
- they are automatically cut out and working principle same as on low pressure sensors.

If the pressure is too low or all sensors are failing, a SHUTDOWN will be activated.

High pressure side, low press shutdown: 145 bar / 175 bar

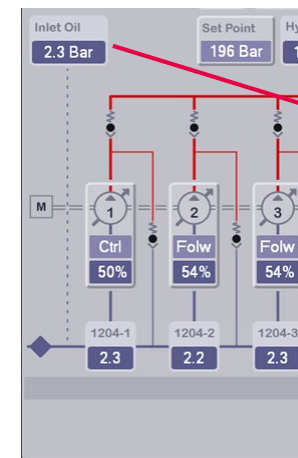

### Alarm:

0,7 bar low oil pressure  
**0,5 bar shut down**

### Deviation alarm:

Sensor value deviates more than 1 bar from the other.





# Agenda

Hydraulic Power Supply (HPS)

- 1 System**
- 2 Filter unit**
- 3 Startup pumps**
- 4 Engine driven pumps**
- 5 Valve block**
- 6 Electric driven pumps**

# Hydraulic Power Supply (HPS)

Valve block – Standard HPS

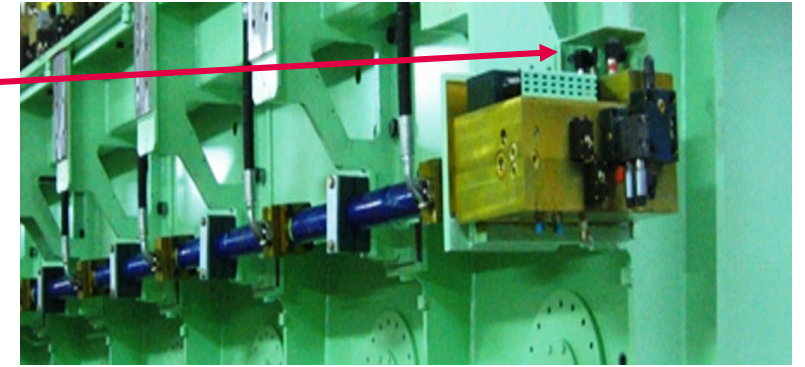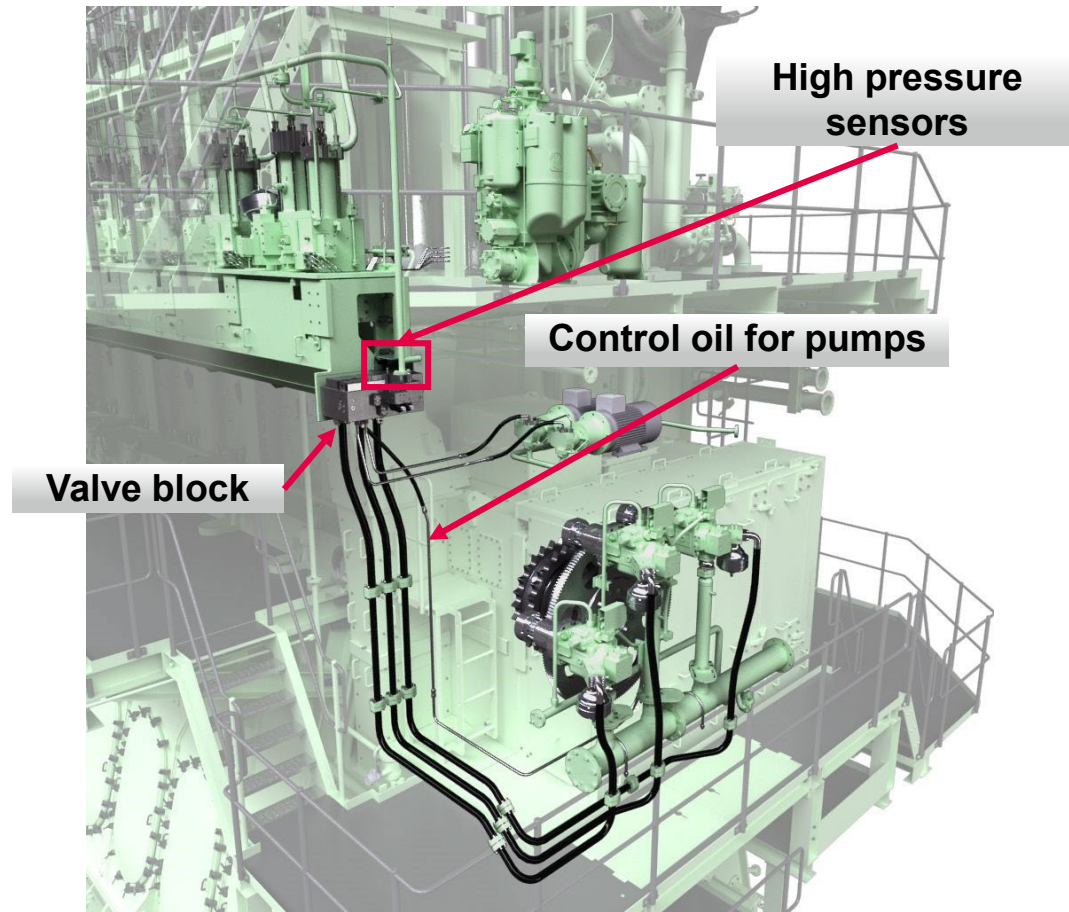


Safety & shutdown valves  
**310 and 311**

**Opening pressure:**  
**310:** 230 / 310 bar or by  
ACU1 & 3 (shutdown)  
**311:** 250 / 315 bar

# Hydraulic Power Supply (HPS)

Valve block – HPS between cylinder 6 and 7

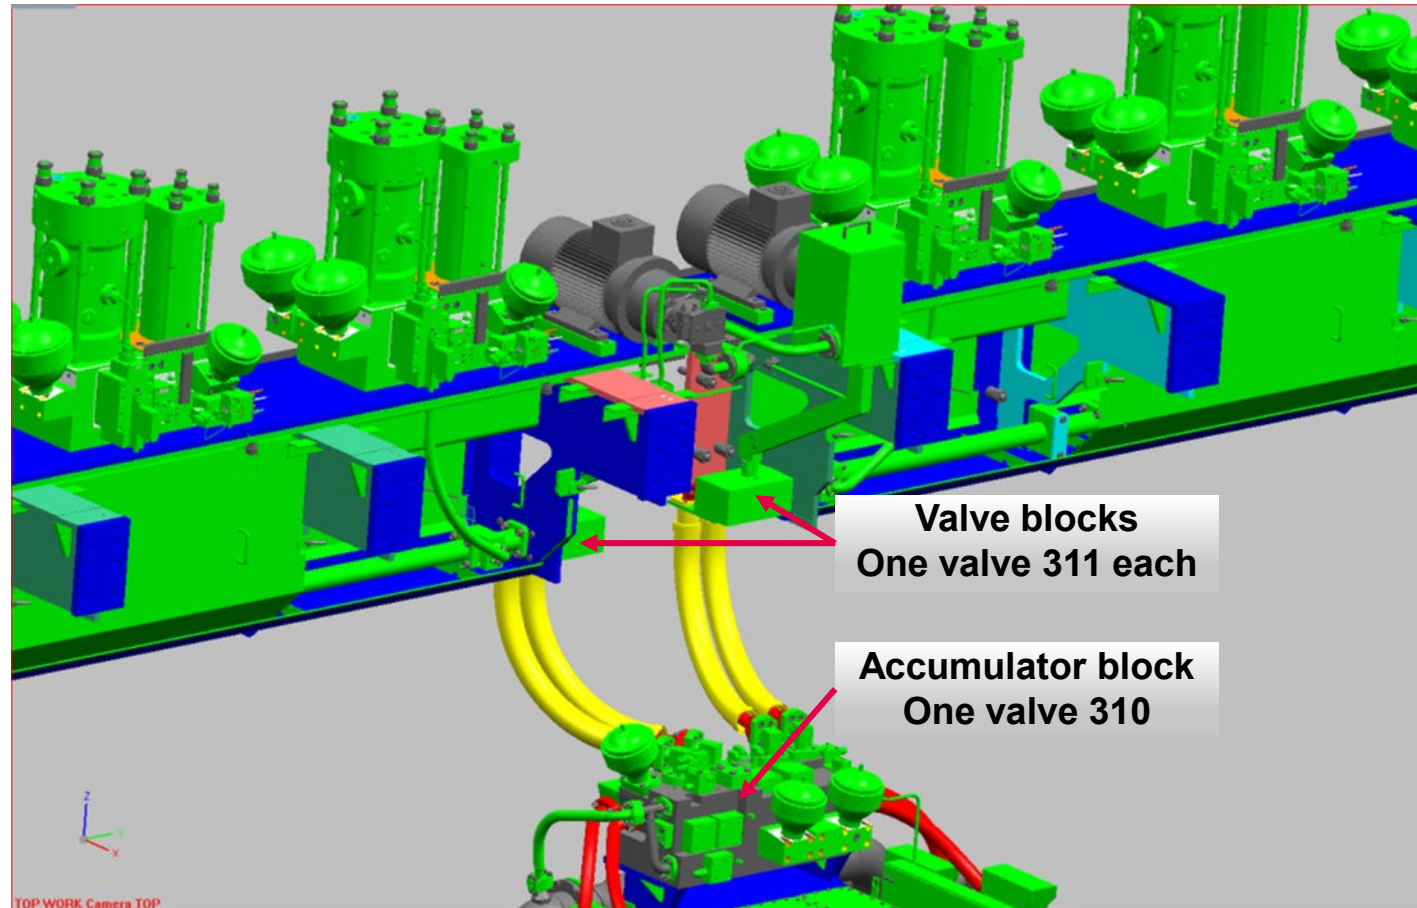


# Agenda

Hydraulic Power Supply (HPS)

- 1 System**
- 2 Filter unit**
- 3 Startup pumps**
- 4 Engine driven pumps**
- 5 Valve block**
- 6 Electric driven pumps**


# Hydraulic Power Supply (HPS)

Electric driven pumps

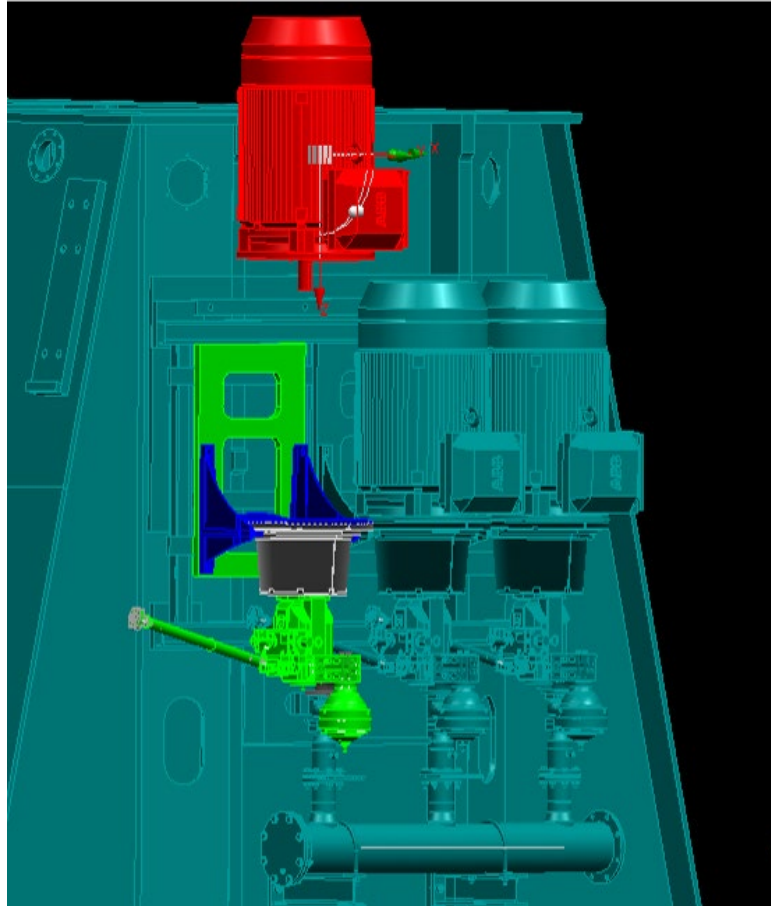

**Overhaul and maintenance**

**Disassembly for main components**

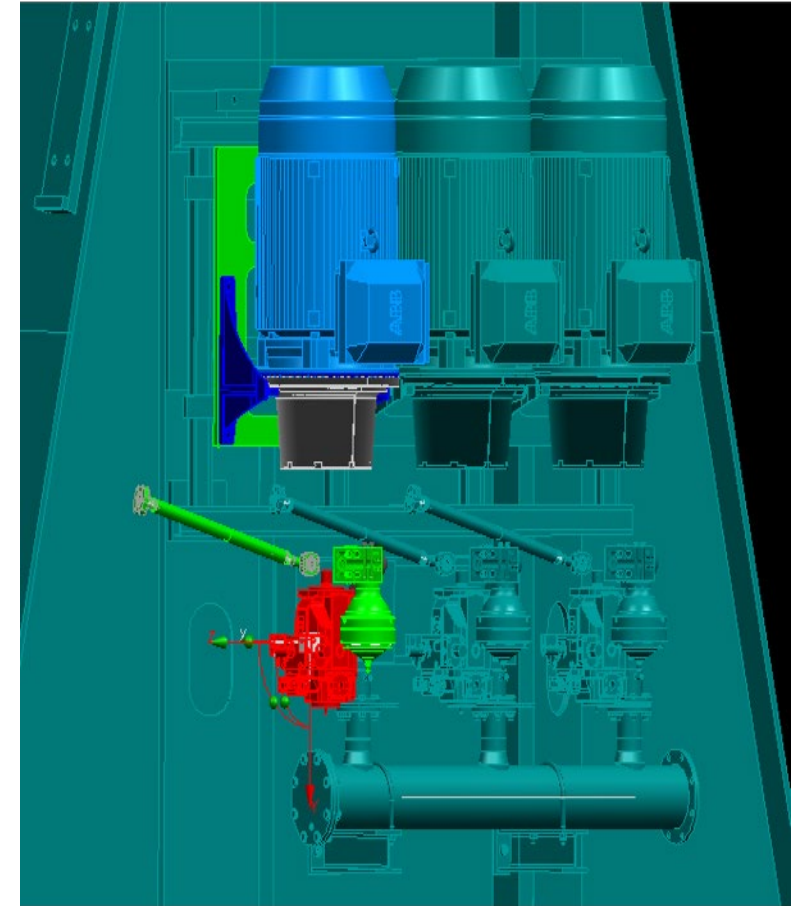


# Hydraulic Power Supply (HPS)


## Electrical driven pumps - Operation

- As an example, if there are four electric driven pumps installed on the engine.
- Two pumps are running at stand - by.
- When engine load increased, next pumps are started automatically with time delay of approximately 2.5 sec. at above 90% of each electric driven pump and share the total swash plate %.

Example: Two pumps running




Three pumps running




- One pump is stopped automatically with time delay of approx. 15 sec. at below 50% of each elec. driven pump.

Example: Four pumps running



Three pumps running



- No. 4 pump is fixed displacement pump
- Max. 85% due to mech. stopper

- Start / stop percentage can be changed without notice.

# Disclaimer

All data provided in this document is non-binding.

This data serves informational purposes only and is especially not guaranteed in any way.

Depending on the subsequent specific individual projects, the relevant data may be subject to changes and will be assessed and determined individually for each project. This will depend on the particular characteristics of each individual project, especially specific site and operational conditions.

# Intellectual property rights

The intellectual property rights of this work are owned and managed by MAN Energy Solutions and are protected both nationally and internationally according to related laws such as copyright law.

This content is for personal learning and non-commercial use only.

You may not modify or reproduce it except for your personal use.

This content is for training purposes only.

This work is the proprietary intellectual property of MAN Energy Solutions.

MAN Energy Solutions owns all rights to this work and the lecture, and this work is only offered by the instructor or via the MAN eAcademy through the MAN Energy Solutions.

Any use of this work at will, without the consent of MAN Energy Solutions, may cause legal problems.

This work is provided for the convenience of course participant, and it does not give intellectual property rights to user.



**MAN Energy Solutions**  
Future in the making



PrimeServ Academy Copenhagen

**MAN PrimeServ**

