


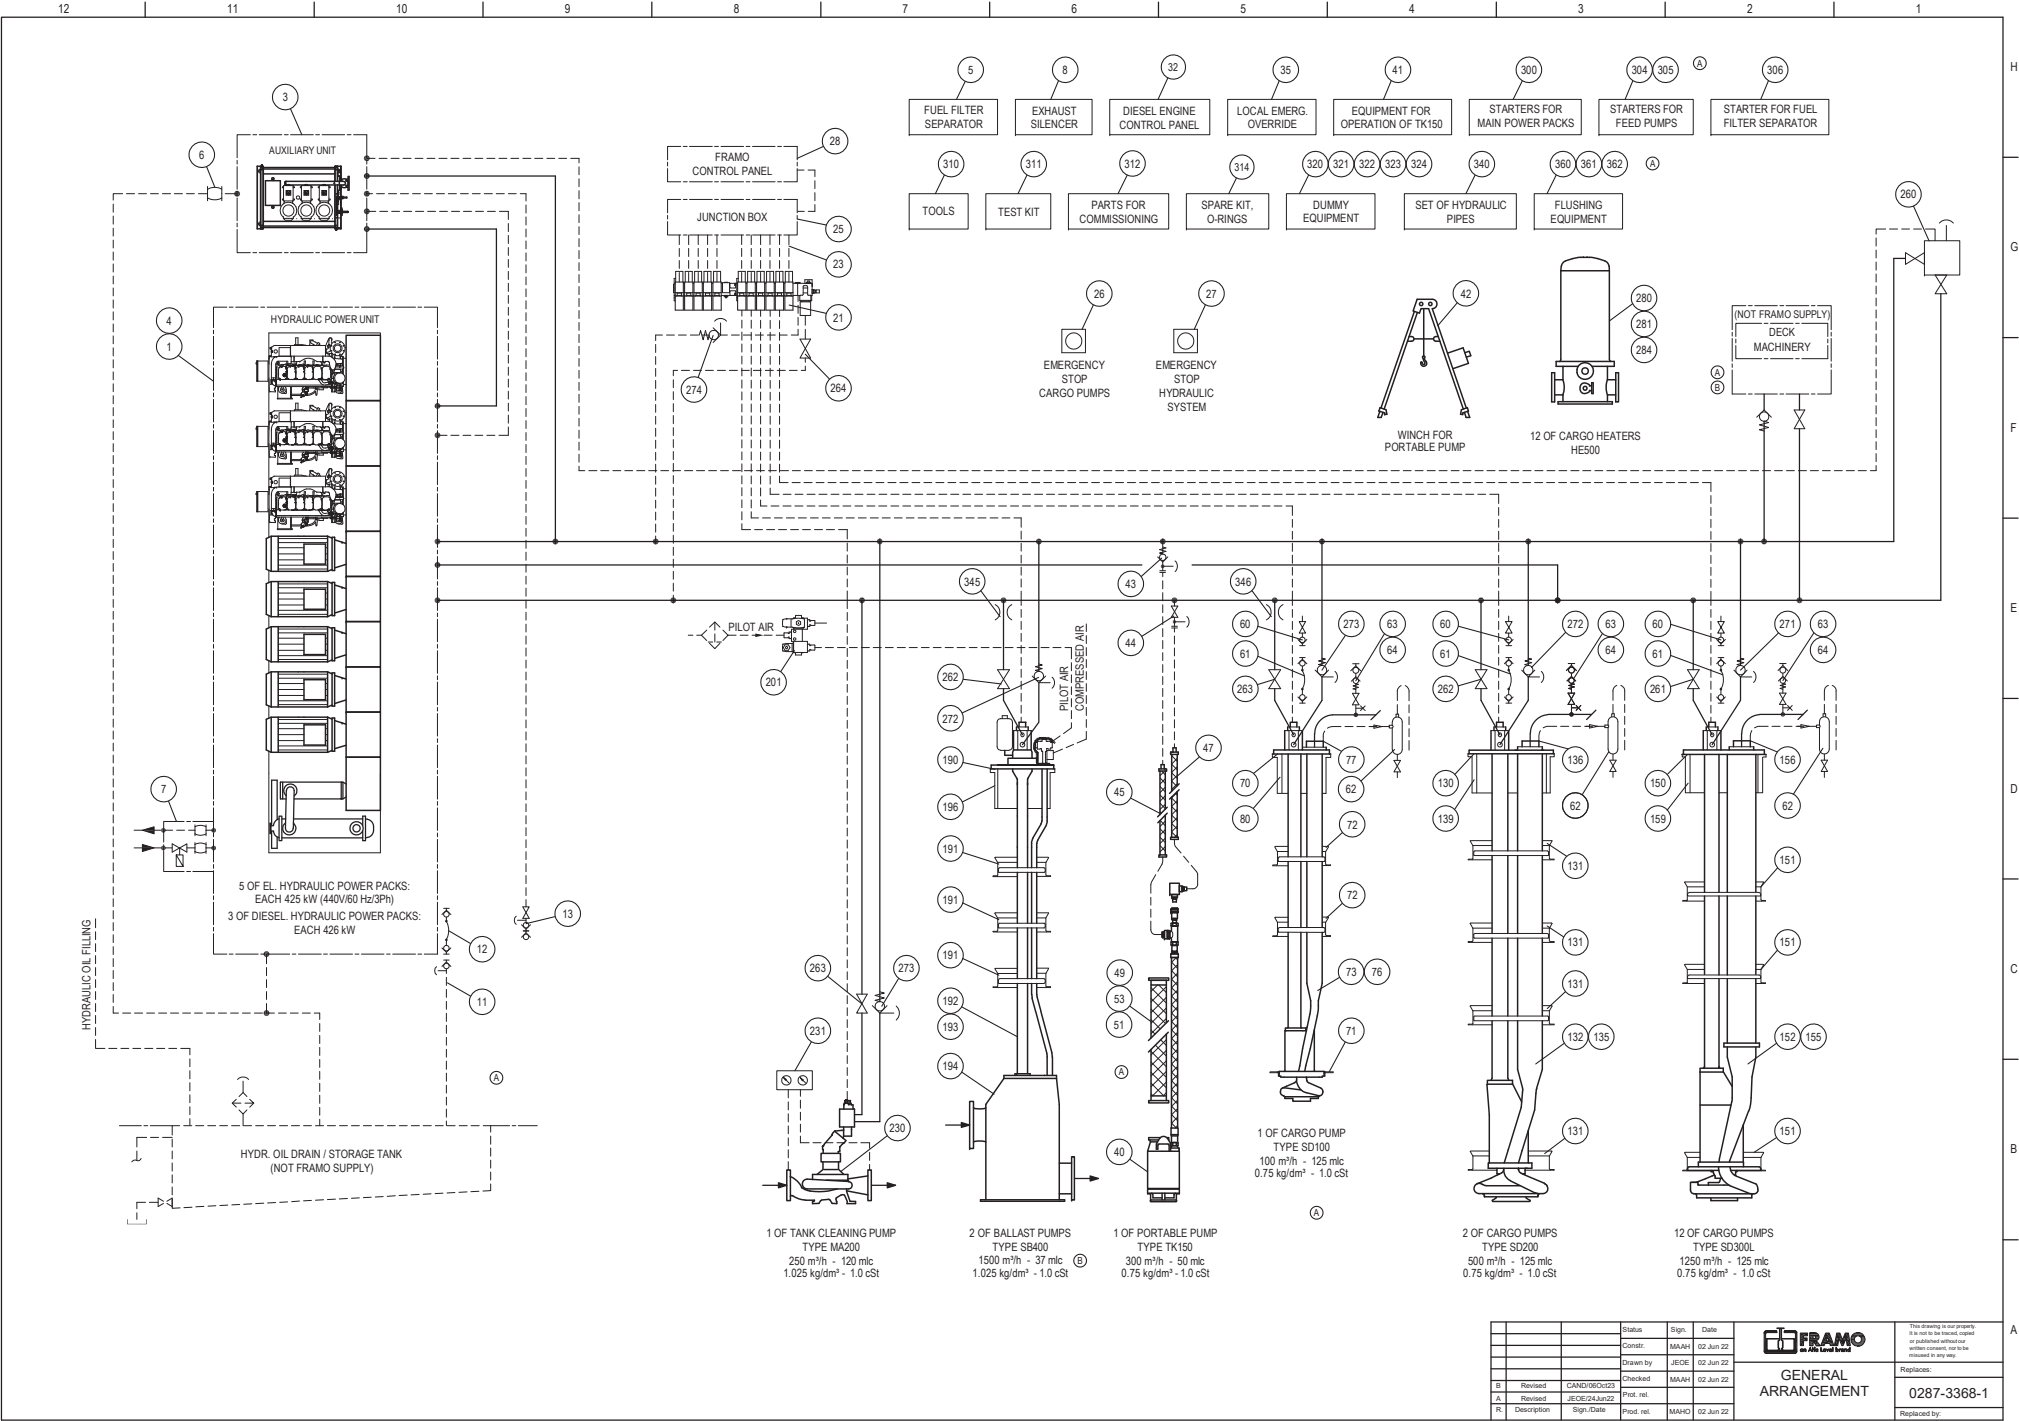

		Status	Sign.	Date	 GENERAL ARRANGEMENT	This drawing is not a project. It is used for reference only. or published without our written consent, no title issued in any way.
		Contr.	MAAH	02 Jun 22		
		Drawn by	JEOE	02 Jun 22		
		Checked	MAAH	02 Jun 22		
B	Revised	CAND/060023			Replaces: 0287-3368-1	Replaced by:
A	Revised	JEOE/24Jun22	Prod. ref.			
R	Description	Sign./Date	Prod. ref.	MAAH 02 Jun 22		

Customer/Yard: K Shipbuilding Co., LTD.

**Hull nos.: S1645, S1646, S1647, S1648,
S1649, S1650**

Classification: ABS

CONTENTS

Chapter 1

FRAMO SUPPLY

- Supply list
- General arrangement
- Equipment drawings

Chapter 2

TECHNICAL DATA

- Technical system data
- Pump specifications
- Performance diagrams

Chapter 3

SYSTEM DRAWINGS

- Hydraulic diagrams
- Electrical diagrams

Chapter 4

SPECIAL INSTRUCTIONS

Chapter 5

APPENDICES

Chapter 1 FRAMO SUPPLY

General arrangement drawing no.: 0287-3368-1

<u>Item</u>	<u>Qty.</u>	<u>ID no.</u>	<u>Description/Title</u>	<u>Drawing no.</u>	<u>Last revision</u>
<u>Power pack unit w / equipment</u>					
1	1	A114855-ABS	Hydraulic power unit Location of snap-on couplings	0363-4939-1 0363-4005-3	
3	1	A98144	Auxiliary unit	0345-3485-1	
4	3	A97255	Compensator exhaust and air filter	0174-0604-3 A97255	
5	1	A98149	Fuel filter separator	0174-0614-4	A
6	1	A25977-ABS	Flexible bellow for overflow pipe	0247-0855-4	
7	1	A50185-ABS	Cooling water accessories (JIS / 220V)	0300-1750-1	
8	3	A78772	Exhaust silencer/spark arrestor	0174-0590-3	
<u>Transfer unit w / equipment</u>					
11	1	A95305	Snap on coupling LP (without ball valve)	0247-1099-3	
12	2	A91784	Flexible hose w/snap-on coupling L = 4m	0247-1094-3	
13	1	A95318	Snap on coupling LP w/ball valve	0247-1102-3	
<u>Control system w / equipment</u>					
21	2	A55189	Remote control valve ass., 9 valves	0125-1366-3	
23	18	A108529	Connectors/cables for remote control valve assembly, L = 17 m Installation drawing	0381-3800-3 1400-0417-3	B

<u>Item</u>	<u>Qty.</u>	<u>ID no.</u>	<u>Description/Title</u>	<u>Drawing no.</u>	<u>Last revision</u>
25	1		DELETED		D
26	2	A19008	Emergency stop (Cargo pumps)	0381-0782-3	F
27	3	A51104	Emergency stop (Hydraulic system)	0381-0782-3	
28	1	A116400	Electric main control panel	0381-8238-2	A
32	3	A116407	Diesel engine control panel	0381-8243-2	
35	1	A38516	Local emergency override panel	0381-1813-3	
<u>Portable pump w / equipment</u>					
40	1	A94097-ABS	Portable pump TK150 Flexible hose, L =24 m	0919-0658-3	
41	1	A94089	Equipment for portable pump operation	0125-1417-3 A94089	
42	1	A80275	Portable winch FM800	0911-1020-4	
43	8	A77045	Non-return valve - LP snap-on	0179-0688-4	
44	8	A101024	Ball valve - HP snap-on	0179-0847-3	
45	1	A17071-ABS	Return hose, L = 24 m	0253-0437-3	
47	1	A94062-ABS	Pressure hose, L = 24 m	0910-0315-3	
49	1	A118206-ABS	Cargo hose ", L = 24 m nitrile/neoprene	0910-0226-3	
51	2	A4739	Bolt/gasket	0911-0589-4	
53	1	A118207-ABS	Cargo hose ", L = 24 m nitrile/neoprene	0910-0232-3	
<u>Equipment for cargo pump</u>					
60	15	88781	Snap-on coupling	0257-0991-4	
61	4	A16436	Flexible hose L = 6 m.	0257-0993-3	
62	15	157065	Exhaust trap	0255-0793-4	
63	15	A58223	Cargo purging valve	0321-0358-2	
64	15	A31206	Welding flange for cargo purging valve	0321-0285-4	

<u>Item</u>	<u>Qty.</u>	<u>ID no.</u>	<u>Description/Title</u>	<u>Drawing no.</u>	<u>Last revision</u>
<u>Cargo pump SD100</u>					
70	1	A27323	Set of bolts and gasket, SD100	0366-1044-4 A27323	
71	1	A68300	Bottom support, SD100	0378-1661-4	
72			Deleted		B
73	1	A89095	Cargo pump SD100 Top plate arrangement Minimum suction well Space for temp. sensor box Orientation of hydraulic con.: 180°	0378-2349-4 0378-2351-4 0378-1706-4 0378-2352-4	B
73-1	(1)		Calculation of pump lengths/supports L = 5632 mm	1400-0657-4	B
76	1		Deleted		B
77	1	A51544	Cargo flange SD100 JIS: SCH. 40 ØB = 102,3 mm, ØC = 114,3 mm	0378-1254-4	A
80	1	A14103	Deck trunk, SD100, H = 500 mm	0378-0454-4	
<u>Cargo pump SD200</u>					
130	2	A27326	Set of bolts and gasket, SD200	0366-1044-4 A27326	
131	8	A5626	Intermediate/bottom support, SD200	0367-0161-2	
132	2	A116300	Cargo pump SD200 Minimum suction well Orientation of hydr. con.: 0°	0367-2970-3 0367-0960-4	
132-0			Calculation of pump lengths/supports L = 20362 mm, A1 = 5200 mm A2 = 10100 mm, A3 = 15100 mm	1400-0657-4	B B
135	2	A83586	Split list for SD200	0367-1515-4 A83586	
136	2	A51581	Cargo flange SD200, JIS, SCH. 40 ØB = 199,9 mm, ØC = 216,3 mm	0367-3199-4	A
139	2	A11641	Deck trunk, SD200, H=500 mm	0367-0224-4	