


OVERRIDE ARRANGEMENT – FRAMO CONTROL SYSTEM

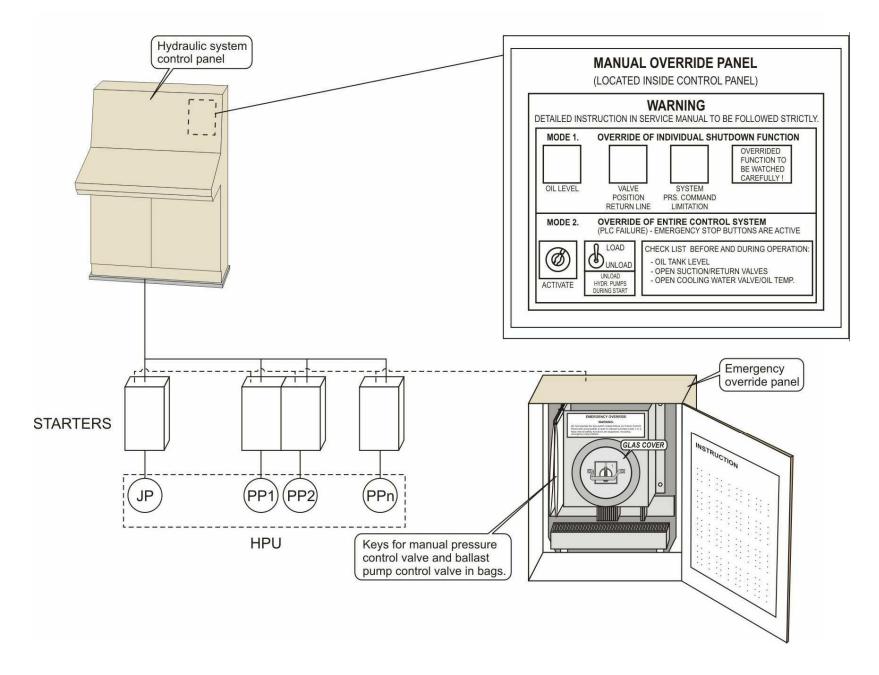

Emergency override Instruction open.

Open system

EMERGENCY OVERRIDE INSTRUCTION

- Break glass cover and operate switch for bypassing 1. stop signals from control panel.
- 2. Start the jockey pump locally at the starters.
- 3. Start required power packs locally at the starters.
- Open system pressure relief valve, fig. 1 (turn CCW). 4.




Fig. 1 System pressure / pump pressure manual control

- 6. Regulate system pressure, with system pressure relief valve. CW = Increase
 - CCW = Decrease
- Regulate ballast pump pressure with manual pressure control screw.

in the emergency override panel.

Open lock-nut

