

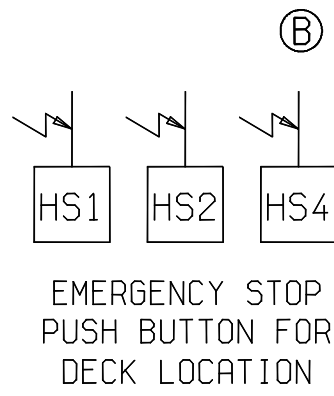
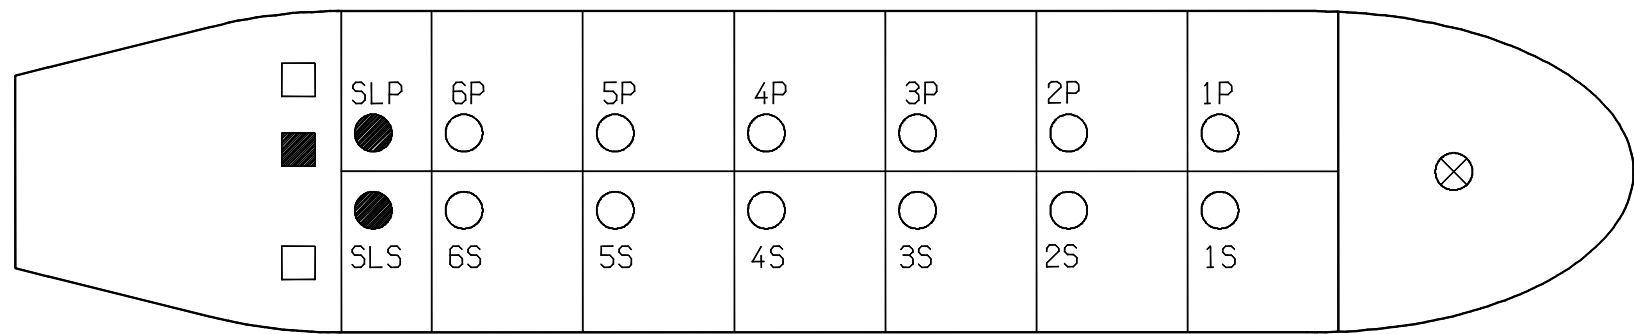




- 12 OF CARGO PUMPS SD150 - 300 m³/h - 110 mlc - 0.8 kg/dm³ - 1.0 cSt
- 2 OF CARGO PUMPS SD100 - 100 m³/h - 110 mlc - 0.8 kg/dm³ - 1.0 cSt
- 1 OF PORTABLE PUMP TK80 - 70 m³/h - 70 mlc - 1.0 kg/dm³ - 1.0 cSt
- 2 OF BALLAST PUMPS SB200 - 350 m³/h - 25 mlc - 1.025 kg/dm³ - 1.0 cSt
- 1 OF TANK CLEANING PUMP MA200/150 - 100 m³/h - 110 mlc - 1.025 kg/dm³ - 1.0 cSt
- ⊗ 1 OF THRUSTER MOTOR - 400 kW - 1550 rpm

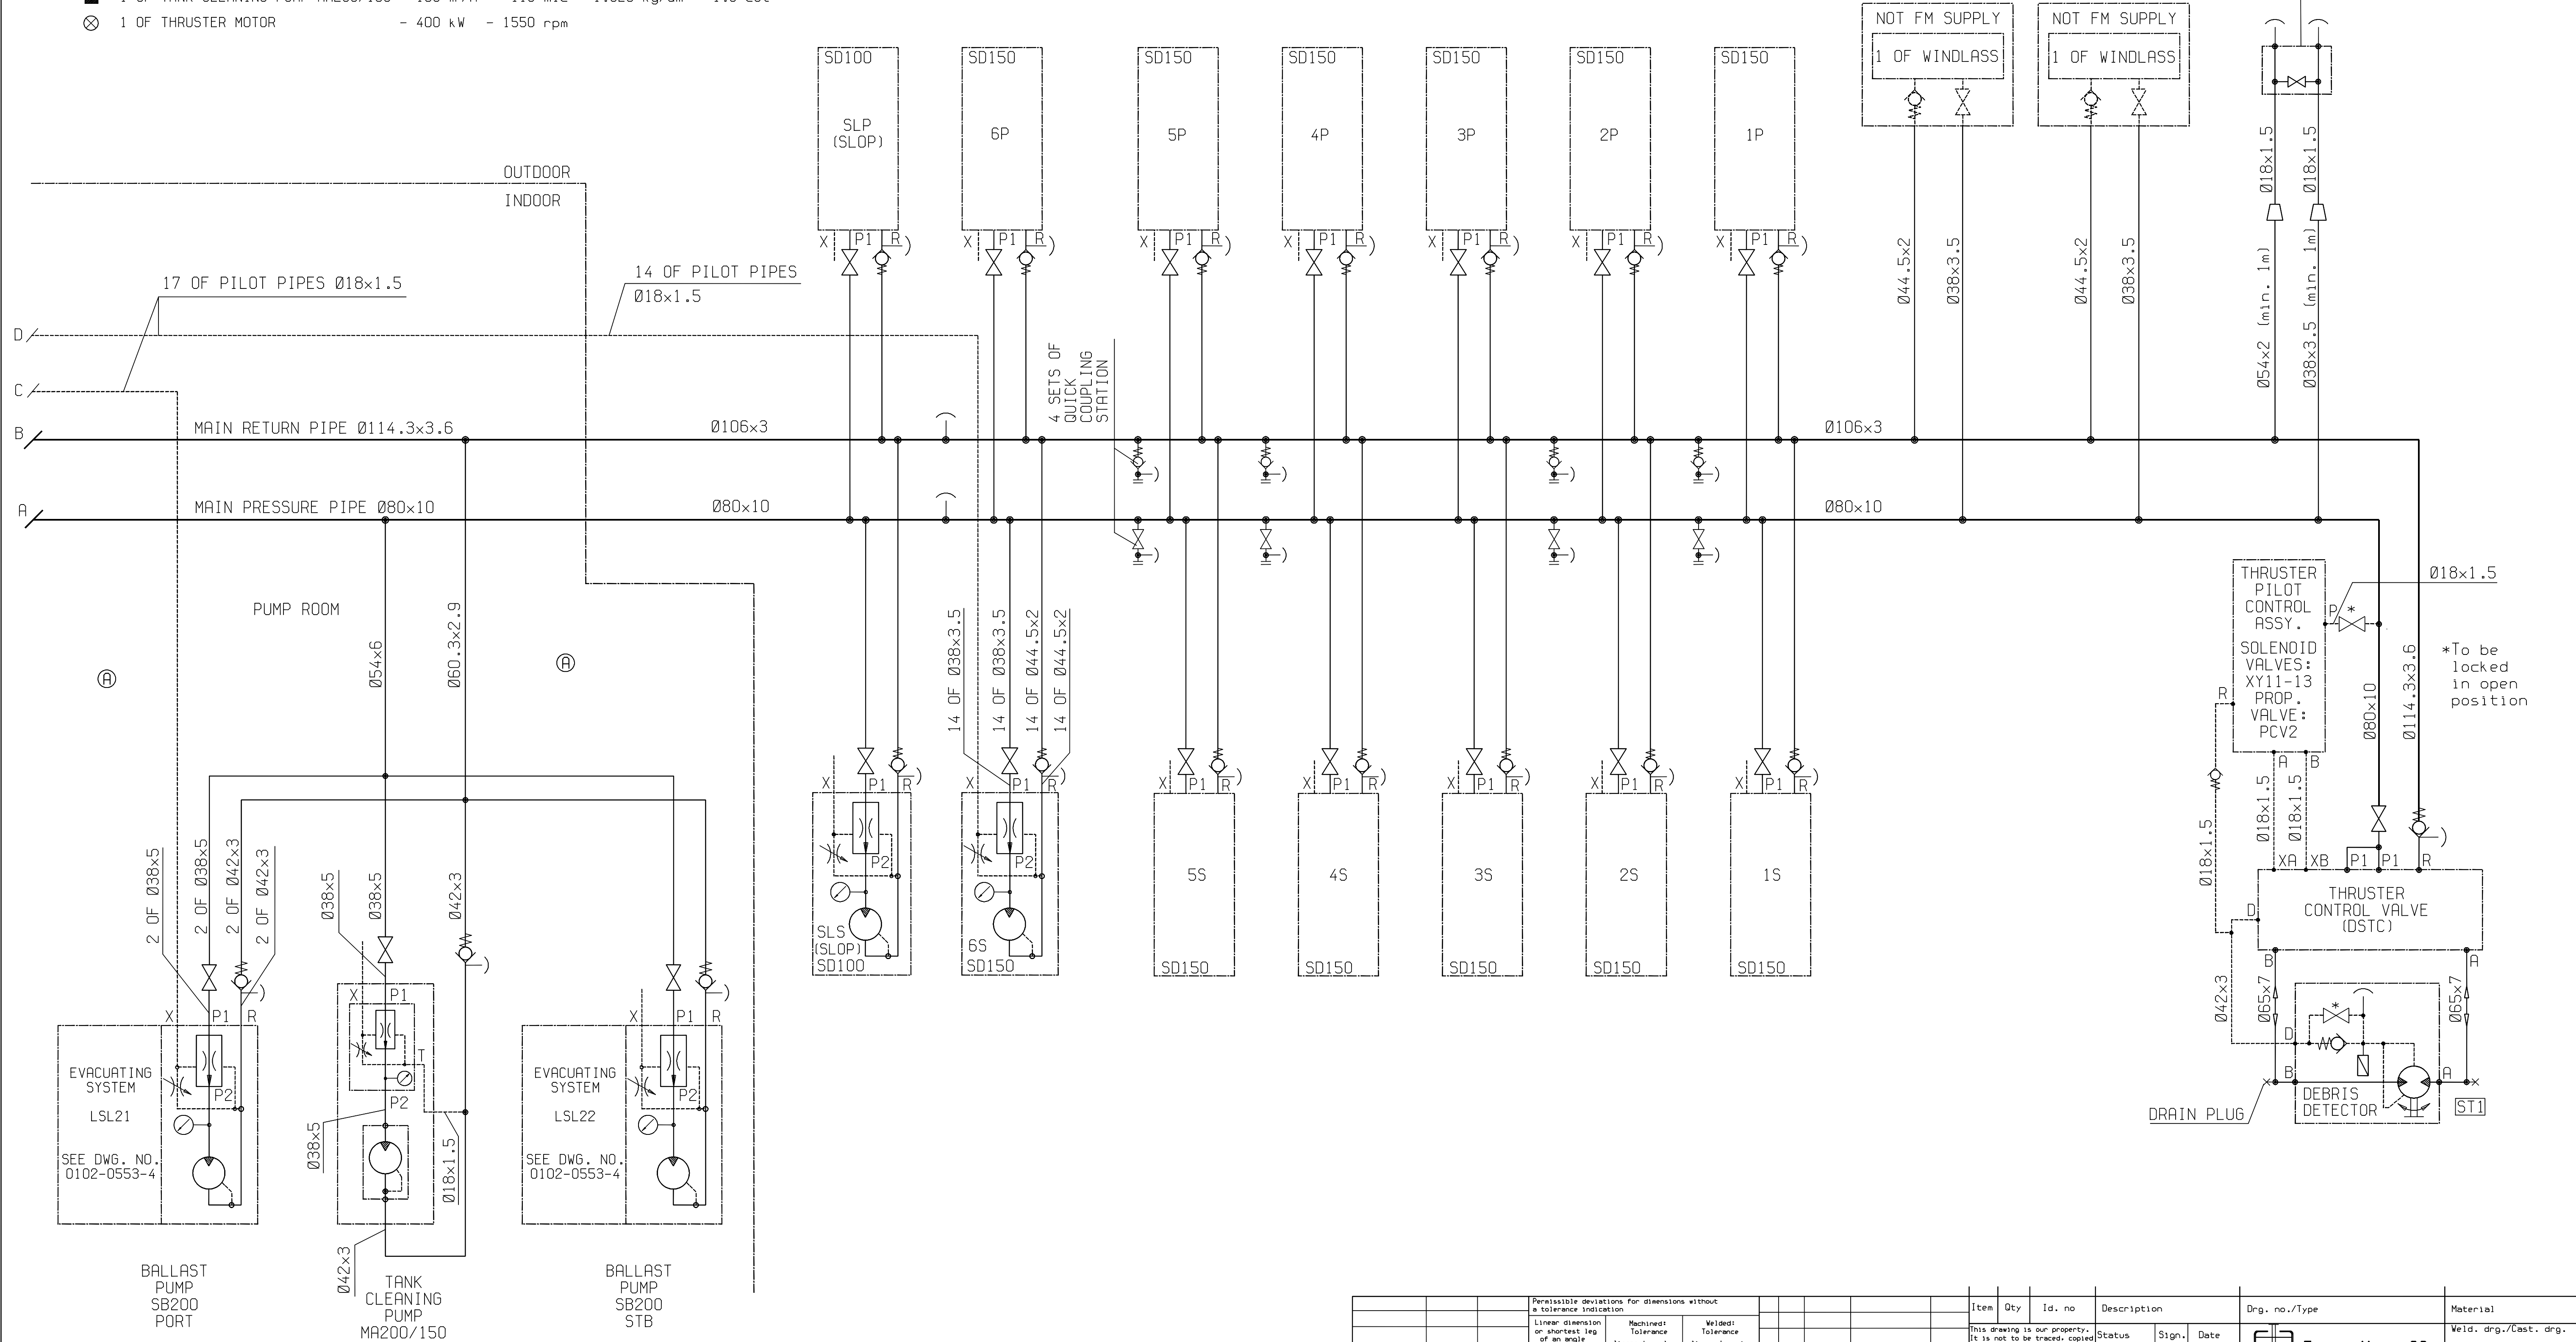

				Permissible deviations for dimensions without a tolerance indication												Item				Qty				Id. no				Description				Drg. no./Type				Material																															
				Linear dimension on shortest leg of an angle				Machined linear angle				Welded Tolerance linear angle																Status				Sign.				Date				 Frank Mohn AS				Weld. drg./Cast. drg.																							
Dia & tolerance				Upper limit Lower limit																																																															
Permissible deviations for dimensions with a tolerance indication				over				± 0.1				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
Surface roughness in Ra (µm)				30				120				315				1000				2000				4000																																											
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.				Fillet. & edg. not dim.											
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
				30				120				315				1000				2000				4000																																											
				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																															
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
				30				120				315				1000				2000				4000																																											
				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																															
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
				30				120				315				1000				2000				4000																																											
				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																															
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
				30				120				315				1000				2000				4000																																											
				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																															
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
				30				120				315				1000				2000				4000																																											
				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																															
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
				30				120				315				1000				2000				4000																																											
				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																															
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
				30				120				315				1000				2000				4000																																											
				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																															
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
				30				120				315				1000				2000				4000																																											
				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																															
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																											
				30				120				315				1000				2000				4000																																											
				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°																																															
				1000				2000				4000																																																							
				± 1.2				± 2				± 3				± 5				± 0.2°				± 0.5°																																											
				6				30				120				315				1000				2000				4000																																							
				± 0.1				± 0.2				± 0.5°				± 1				± 0.5°																																															
				6				30				120				315				1000				2000				4000																																							
				± 0.2				± 0.5				± 0.8°				± 1.5				± 2				± 0.5°												</																															